

SPECIFICATION SHEET

Type:

Model:

Project:

MODEL 6540 Landscape Series • Path & Spread Lights

FIXTURE SPECIFICATIONS:

HOUSING:

Die-cast, copper-free aluminum.

STEM:

1" sq. aluminum tube with ½" NPT.

FINISH:

Polyester powder-coat finish available in Black, Verde, Architectural Brick, Architectural Bronze, Light Bronze, Dark Bronze, Special Bronze, Granite, Pewter, Terracotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White.

LENS:

Clear, high-impact, polycarbonate lens.

LAMP TYPE:

High Output LED with Vista exclusive smart-driver, powered to operate for 50,000 hours or Vista T3 LED lamp only, 2.5 watt standard.

ELECTRICAL:

Input voltage range 9-15V AC, regulated to achieve uniform illumination throughout the cable run of fixtures. Integral surge & reverse polarity protection.

MOUNTING:

Bottom of stem threaded with ½" NPT. Fixture may be mounted into threaded hubs in junction boxes, ground stakes, or floor-mounting canopies. Please see fixture ordering information for mounting selection.

FASTENERS:


All fasteners are stainless steel.


WIRING:

Prewired with a three-foot pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

All Vista luminaires are MADE IN U.S.A.

DIMENSIONS:

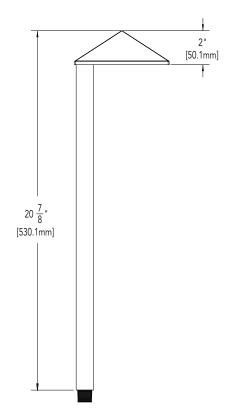



Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

MODEL 6540 Landscape Series • Path & Spread Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: PR-6540-B-W-LB2ND or PR-6540-B-2.5-W-T3

| MOUNTING | MODEL | FINISH | COLOR TEMP | LAMP |
|-----------------------|-------|--------------|-------------------------------------|---|
| PR - ABS ground stake | 6540 | GT - Granite | | 2.5-W-T3 |
| | | | W - Warm N - Neutral C - Cool | LB2ND - 2.5 watt LB5ND - 5 watt LED - Group B Emitter Qty - 1 Temperature - Warm (W), Neutral (N), Cool (C) Operating voltage range - 9 to 15V. (Please see lamp order code column on lamp guide, Vista product catalog.) |

Fixtures shipped with standard lamp, unless otherwise specified.

Fixtures shipped with specified mounting hardware.

Note: Optional custom length stems available. Consult local distributor.