



**PROFESSIONAL
OUTDOOR LIGHTING**

Type:

Model:

Project:

SPECIFICATION SHEET

MODEL 5006 Landscape Series • Up & Accent Lights

FIXTURE SPECIFICATIONS:

HOUSING:

Die-cast, copper-free aluminum.

SHROUD:

Die-cast, copper-free aluminum fitted to housing with a silicone O-ring gaskets – providing a superior weather-tight seal.

FINISH:

Polyester powder-coat finish available in Black, Verde, Architectural Brick, Architectural Bronze, Light Bronze, Dark Bronze, Special Bronze, Granite, Pewter, Terracotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White.

LENS:

Clear, tempered, shock and heat-resistant, soda-lime glass lens.

LAMP TYPE:

MR-16 LED Lamp Only - 36° Flood, 4.5W is standard.

Optics:

Available in 15° Narrow Spot, 25° Spot, 36° Flood, or 60° Wide Flood distributions.

MOUNTING:

Injection-molded composite adjustable knuckle with 1/2" NPS stem. Fixture may be mounted into threaded hubs in junction boxes, ground stakes (GR), tree mount boxes (TR), or mounting canopies (WR).

FASTENERS:


All fasteners are stainless steel.

WIRING:

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

All Vista luminaires are **MADE IN U.S.A.**

DIMENSIONS:

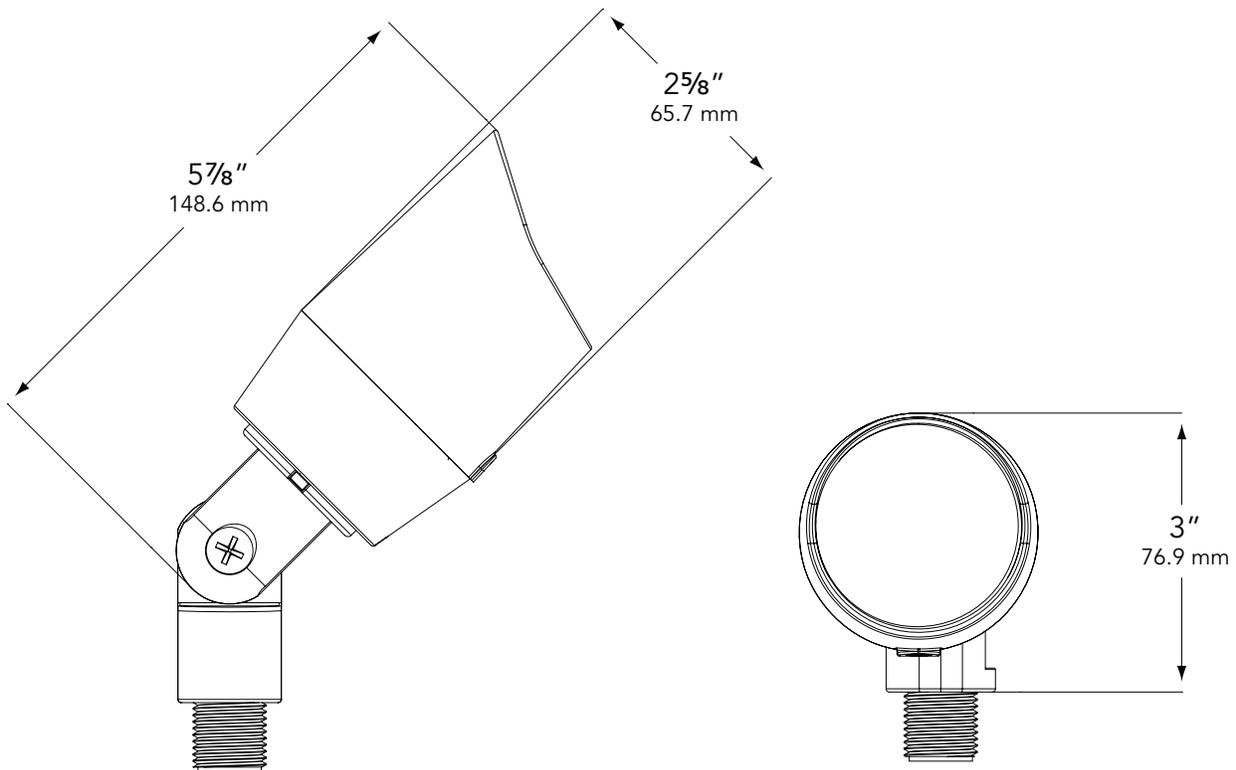

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

MODEL 5006 Landscape Series • Up & Accent Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: GR-5006-B-4.5-W-25-SL

MOUNTING	MODEL	FINISH	WATTAGE	COLOR TEMP	DISTRIBUTION	ACCESSORIES
GR - ABS ground stake WR - Wall-mount canopy TR - Tree-mount junction box	5006	B - Black G - Verde BR - Architectural Brick Z - Architectural Bronze LZ - Light Bronze DZ - Dark Bronze SB - Special Bronze GT - Granite P - Pewter TC - Terracotta R - Rust HG - Hunter Green M - Mocha WB - Weathered Bronze WI - Weathered Iron W - White	2.5 4 4.5 5 5.5	W - Warm	15 -15° Narrow Spot 25 - 25° Spot 36 - 36° Flood 60 - 60° Wide Flood	FR - Frosted Lens BL - Flat Cool Blue Lens SL - Flat Spread Lens DBL - Flat Dark Blue Lens GL - Flat Dark Green Lens RL - Flat Red Lens YL - Flat Amber Lens HL - Honeycomb Louver 5 - 5' Wire Lead NOTE: * If fixture to be used with Extended Arm Mount (EAM) - <u>must order</u> with extended wire length

Fixtures shipped with standard lamp, unless otherwise specified.

Fixtures shipped with specified mounting hardware.