



PROFESSIONAL
OUTDOOR LIGHTING

SPECIFICATION SHEET

Type:

Model:

Project:

MODEL 5271-LED Landscape Series • In-Ground & Well Lights

FIXTURE SPECIFICATIONS:

HOUSING:

Injection-molded, glass-reinforced Ryton® R-4 composite for strength and high UV stability – warranted for ten years against corrosion.

LENS COVER:

Injection-molded, glass-reinforced Ryton® R-4 composite fitted to housing with a silicone O-ring gasket – providing a superior weather-tight seal.

FINISH:

Durable powder coat finish available in Black, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.

LENS:

Clear, tempered, shock and heat-resistant, soda-lime glass lens- crowned (convex) to promote water runoff. Optical effect lenses are available; see accessories column on fixture ordering information chart.

LAMP TYPE:

High Output LED with Vista exclusive smart-driver, powered to operate for 50,000 hours.

OPTICS:

Integral high-efficiency optics available in spot through flood beam spreads.

ELECTRICAL:

Input voltage range 10.5–15V AC, regulated to achieve uniform illumination throughout the cable run of fixtures. Integral surge & reverse polarity protection.

MOUNTING:

In-grade. Conduit mount fixtures have two 3/4" NPT inlets on bottom. Optional concrete mounting kit available; please see accessories column on fixture ordering information chart.

FASTENERS/INSERTS:



All fasteners are stainless steel with brass inserts.

WIRING:

Prewired with a three-foot pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

All Vista luminaires are **MADE IN U.S.A.**

DIMENSIONS:

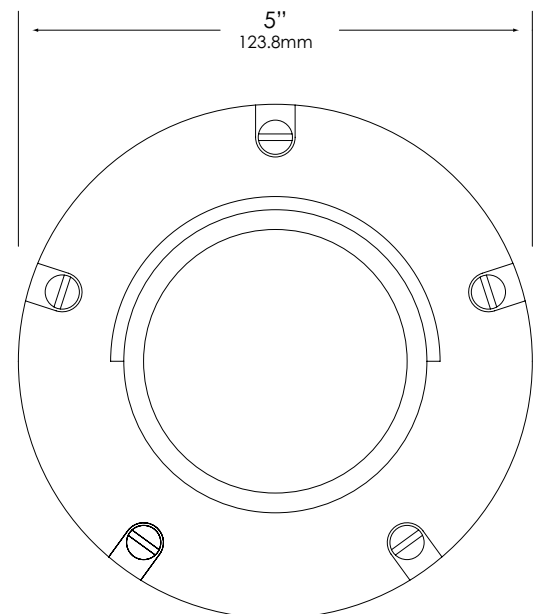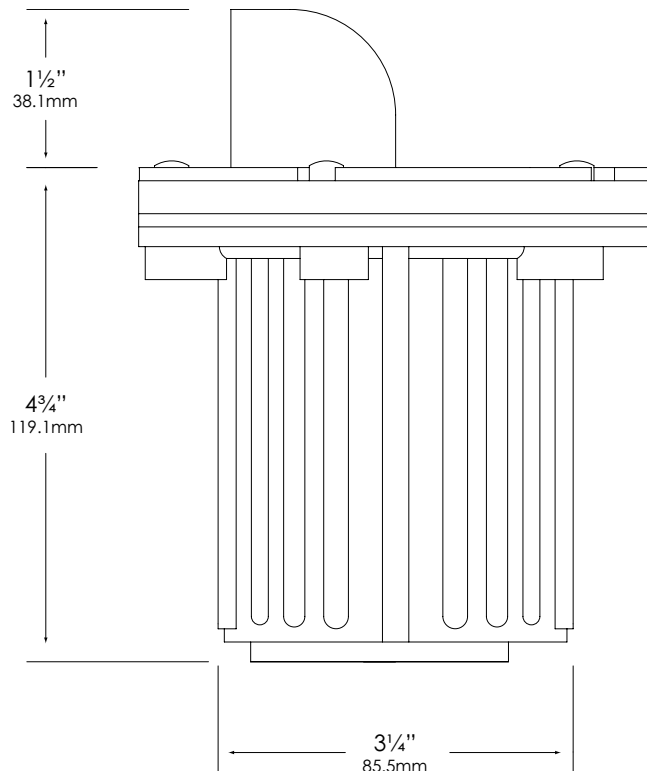

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



PROFESSIONAL
OUTDOOR LIGHTING

SPECIFICATION SHEET

MODEL 5271-LED Landscape Series • In-Ground & Well Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: GW-5271-B-W-LF3SP-SL

MOUNTING	MODEL	FINISH	COLOR TEMP	LAMP	ACCESSORIES
GW - In-grade CM - In-grade conduit mount	5271	Standard	W - Warm C - Cool	LF3SP - 3 emitter, 5W, Spot LF3MF - 3 emitter, 5W, Med. Flood LF3WF - 3 emitter, 5W, Wide Flood LF6SP - 6 emitter, 10W, Spot LF6MF - 6 emitter, 10W, Med. Flood LF6WF - 6 emitter, 10W, Wide Flood LF9SP - 9 emitter, 17W, Spot LF9MF - 9 emitter, 17W, Med. Flood LF9WF - 9 emitter, 17W, Wide Flood LED - Group F Emitter Qty - 3, 6 or 9 Temperature - Warm (W) or Cool (C) Operating voltage range - 10.5 to 15V. (Please see lamp order code column on lamp guide, Vista product catalog.)	CBL - Crowned Cool Blue lens CFR - Crowned Frosted lens SL - Flat Spread lens DBL - Flat Dark Blue lens GL - Flat Dark Green lens RL - Flat Red lens YL - Flat Amber lens HL - Honeycomb louver
		B - Black DZ - Dark Bronze GT - Granite W - White			
		Premium			
		BR - Architectural Brick LZ - Light Bronze SB - Special Bronze GG - Glossy Gray R - Rust HG - Hunter Green WB - Weathered Bronze WI - Weathered Iron GM - Graphite Metallic			
		Hand Finished			
		G - Verde P - Pewter M - Mocha OF - Olde Finish			

Fixtures shipped with standard lamp, unless otherwise specified.

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.