



**VISTA  
PROFESSIONAL  
OUTDOOR  
LIGHTING**


## INSTALLATION INSTRUCTIONS

# TMS-150

ACCESSORIES

## Tree Mount Junction Box

UV-Stable Nylon Straps

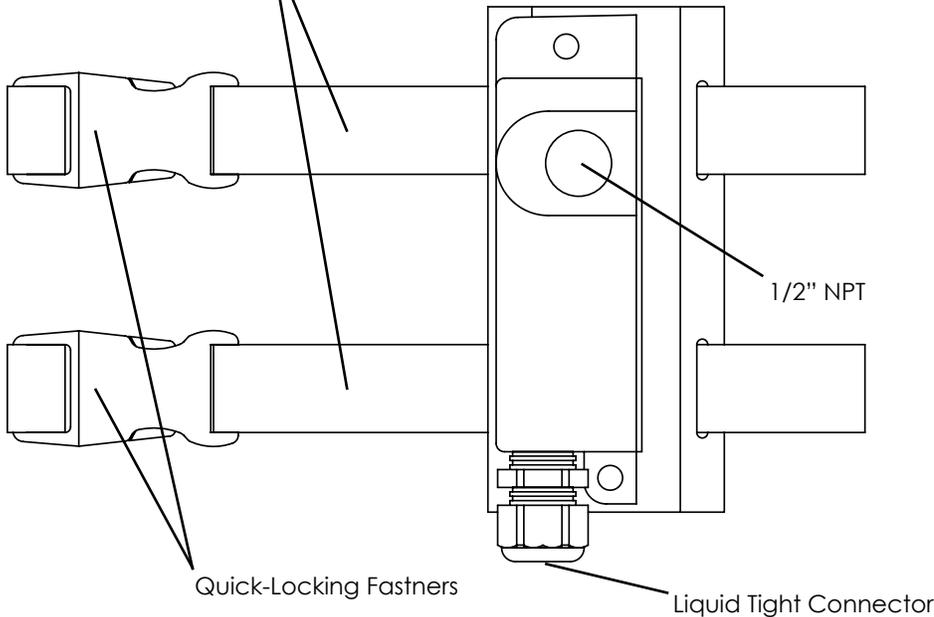

**TOOLS REQUIRED FOR INSTALLATION:**

- Wire strippers
- Phillips head screwdriver

**FOR USE ONLY WITH LOW VOLTAGE LANDSCAPE POWER UNITS THAT DO NOT EXCEED 25 AMPS, 15 VOLTS MAXIMUM.**

**WARNING:** Junction boxes must be installed in accordance with the National Electrical Code (NEC) and local codes. Failure to do so will void the warranty and may result in serious injury and/or damage to the luminaire.

**LUMINAIRES ARE NOT TO BE INSTALLED WITHIN 10 FT. (3.05M) OF A POOL OR SPA. SECONDARY CABLE IS NOT TO BE BURIED MORE THAN 6". WHEN USING MULTIPLE LUMINAIRES, LOAD IS NOT TO EXCEED THE TOTAL WATTS OF TRANSFORMER RATING. DO NOT USE EXTENSION CORDS ON POWER UNITS.**

**NOTE:** Always use UL recognized wire connectors for connections.

**NOTE:** Save these instructions for future reference.

**JUNCTION BOX IS UL LISTED FOR ABOVE GROUND INSTALLATION ONLY.**

### TREE MOUNT JUNCTION BOX INSTALLATION:

1. Place tree mount box at the desired position on tree.
2. Adjust nylon straps to fit snugly around the tree trunk.
3. Snap in quick-locking fasteners to secure.
4. To prevent electrical shock, disconnect transformer from electrical supply before service.
5. Install liquid tight connector (provided) in bottom 1/2" UL Listed NPT fitting.
6. Loosen nut on liquid tight connector and insert main supply cable to desired length.
7. Tighten nut on liquid tight connector to secure wire.
8. Thread luminaire into 1/2" NPT fitting and secure with allen screw (provided) at desired location.
9. Using the silicone filled safety connectors (provided), make connections and insert wires into the box.
10. Secure front cover using gasket (provided) and two (2) phillips head screws (provided).
11. Supply power to the junction box and check for proper operation.