



PROFESSIONAL  
OUTDOOR LIGHTING

## SPECIFICATION SHEET

Type:

Model:

Project:

### MODEL 4704 Landscape Series • Path & Spread Lights

#### FIXTURE SPECIFICATIONS:

**HOUSING:**

Die-cast, copper-free aluminum.

**STEM:**

½" schedule-40 aluminum pipe with ½" NPT.

**FINISH:**

Polyester powder-coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Grey, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish.

**SOCKET/LAMP HOLDER:**

Top grade ceramic socket with nickel contacts, stainless steel springs, and Teflon-jacketed wire leads.

**LENS:**

Clear, high-impact, polycarbonate lens.

**LAMP TYPE:**

T3 LED lamp only, 2.5 watt standard. Also available with Integrated LED Module with Vista exclusive smart driver.

**ELECTRICAL:**

Input voltage range 9–15V AC, regulated to achieve uniform illumination throughout the cable run of fixtures. Integral surge & reverse polarity protection.

**MOUNTING:**

Bottom of stem threaded with ½" NPT. Fixture may be mounted into threaded hubs in junction boxes, ground stakes, or floor-mounting canopies. Please see fixture ordering information for mounting selection.

**FASTENERS:**

All fasteners are stainless steel.


**WIRING:**

Provided with a three-foot pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

**CERTIFICATION:**

UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838). Maximum wattages allowed by Underwriters Laboratories (UL) for U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about maximum wattages allowed by UL Canadian standards.

#### DIMENSIONS:

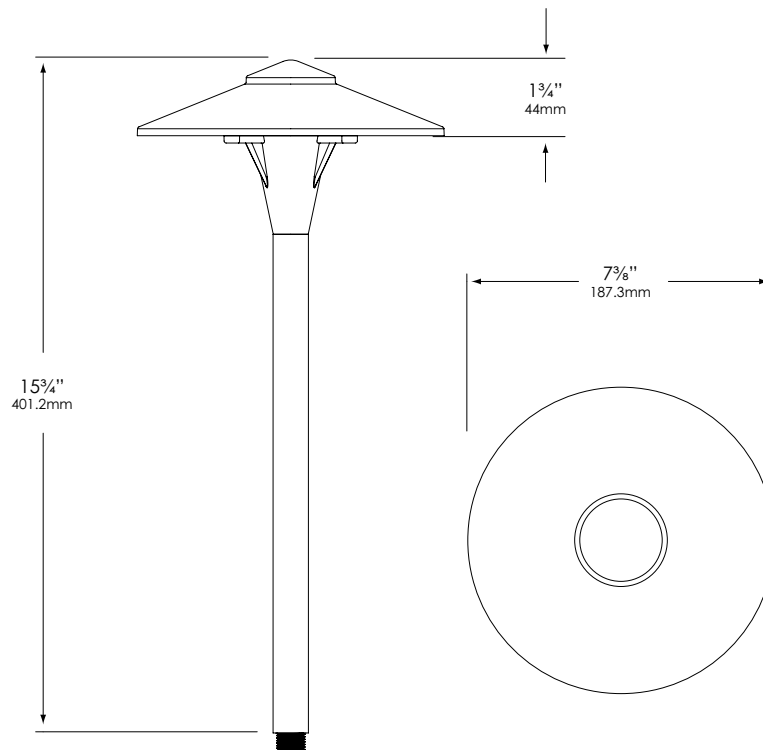

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



**PROFESSIONAL**  
OUTDOOR LIGHTING

## SPECIFICATION SHEET

### MODEL 4704 Landscape Series • Path & Spread Lights

#### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

**EXAMPLE: PR-4704-B-W-LB2ND or PR-4704-B-2.5-W-T3**

MOUNTING	MODEL	FINISH	LAMP
PR - ABS ground stake	4704	Standard	2.5-W-T3-Warm LED T3 Lamp
		B - Black	<b>INTEGRATED LED MODULE</b>  W-LB2ND - Warm 2.5W N-LB2ND - Neutral 2.5W C-LB2ND - Cool 2.5W  W-LB5ND - Warm 5W N-LB5ND - Neutral 5W C-LB5ND - Cool 5W  (Please see lamp order code column on lamp guide, Vista product catalog.)
		Z - Architectural Bronze	
		DZ - Dark Bronze	
		GT - Granite	
		W - White	
		Premium	
		BR - Architectural Brick	
		LZ - Light Bronze	
		SB - Special Bronze	
		GG - Glossy Gray	
		R - Rust	
		HG - Hunter Green	
		WB - Weathered Bronze	
		WI - Weathered Iron	
		GM - Graphite Metallic	
		Hand Finished	
		G - Verde	
		P - Pewter	
		M - Mocha	
		OF - Olde Finish	

Fixtures shipped with standard lamp, unless otherwise specified.

Fixtures shipped with specified mounting hardware.

Note: Optional custom length stems available. Consult local distributor.

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.