

SPECIFICATION SHEET

Type:

Model:

Project:

MODEL 6500-LED Landscape Series • Path & Spread Lights

FIXTURE SPECIFICATIONS:

HOUSING:

Die-cast, copper-free aluminum.

STEM:

 $\frac{1}{2}$ " schedule-40 aluminum pipe with $\frac{1}{2}$ " NPT custom bushing designed with a stress-dispersing collar, to provide strength and stability for mounting.

FINISH:

Polyester powder-coat finish available in Black, Verde, Architectural Brick, Architectural Bronze, Light Bronze, Dark Bronze, Granite, Pewter, Terracotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White.

LENS:

Clear, high-impact, polycarbonate lens.

Ι ΔΜΡ ΤΥΡΕ

High Output LED with Vista exclusive smart-driver, powered to operate for 50,000 hours.

ELECTRICAL:

Input voltage range 6–15V AC, regulated to achieve uniform illumination throughout the cable run of fixtures. Integral surge & reverse polarity protection.

MOUNTING:

Bottom of stem threaded with $\frac{1}{2}$ " NPT. Fixture may be mounted into threaded hubs in junction boxes, ground stakes, or floor-mounting canopies. Please see fixture ordering information for mounting selection.

FASTENERS:


All fasteners are stainless steel.

WIRING:

Prewired with a three-foot pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

All Vista luminaires are MADE IN U.S.A.

DIMENSIONS:

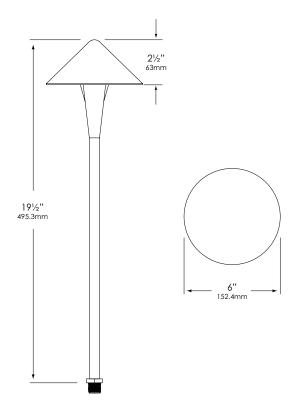

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

MODEL 6500-LED Landscape Series • Path & Spread Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: PR-6500-B-W-LB2ND

MOUNTING	MODEL	FINISH	LAMP	COLOR TEMP
PR - ABS ground stake	6500	B - Black	LB2ND - 2.5 watt	W - Warm
		G - Verde	LB5ND - 5 watt	N - Neutral
		BR - Architectural Brick		C - Cool
		Z - Architectural Bronze	LED - Group B	
		LZ - Light Bronze	Emitter Qty - 1	
		DZ - Dark Bronze	Temperature - Warm (W), Neutral (N),	
		GT - Granite	Cool (C)	
		P - Pewter	Operating voltage range - 6 to 15V.	
		TC - Terracotta		
		R - Rust	(Please see lamp order code column on	
		HG - Hunter Green	lamp guide, Vista product catalog.)	
		M - Mocha		
		WB - Weathered Bronze		
		WI - Weathered Iron		
		W - White		

Fixtures shipped with standard lamp, unless otherwise specified. Fixtures shipped with specified mounting hardware.