



Supreme Sand Filter Systems
are designed and equipped to offer
the ideal combination of energy
efficient, trouble-free operation
and crystal clear, sparkling water.

Features:

- Large sand filter bodies for extra-long filtering cycles and heavy-duty capacity
- Each system is designed for quick assembly and precise alignment of components
- Pump and filter performance matched to provide optimum flow and energy efficiency
- 7-position, threaded multi-port valve is easy to use and install
- Top-of-the-line Supreme Pool Pump
- All the hoses, fittings and clamps needed for installation
- Pump and filter mounting bases, plus accessory base for optional chlorinator and timer
- Long-lasting stainless steel pressure gauge



Part No.	Filter	Dia.	Filtration Area	Flow Rate	Pump	HP	Cord
520-5307-3S	FS01619	16"	1.4 sq. ft.	35 GPM	PH1100-3	1	3 ft. TL
520-5327-3S	FS01922	19"	2.0 sq. ft.	45 GPM	PH1100-3	1	3 ft. TL
520-5337-3S	FS01922	19"	2.0 sq. ft.	45 GPM	PH1150-3	1.5	3 ft. TL
520-5357-3S	FS02225	22"	2.6 sq. ft.	55 GPM	PH1100-3	1	3 ft. TL
520-5347-3S	FS02225	22"	2.6 sq. ft.	55 GPM	PH1150-3	1.5	3 ft. TL
520-5307-6S	FS01619	16"	1.4 sq. ft.	35 GPM	PH1100-6	1	3 ft. NEMA
520-5327-6S	FS01922	19"	2.0 sq. ft.	45 GPM	PH1100-6	1	3 ft. NEMA
520-5337-6S	FS01922	19"	2.0 sq. ft.	45 GPM	PH1150-6	1.5	3 ft. NEMA
520-5357-6S	FS02225	22"	2.6 sq. ft.	55 GPM	PH1100-6	1	3 ft. NEMA
520-5347-6S	FS02225	22"	2.6 sq. ft.	55 GPM	PH1150-6	1.5	3 ft. NEMA
520-5367-6S	FS02629	26"	3.5 sq. ft.	70 GPM	PH1150-6	1.5	3 ft. NEMA
520-5367-3S	FS02629	26"	3.5 sq. ft.	70 GPM	PH1150-3	1.5	3 ft. TL
520-5367-6S	FS02629	26"	3.5 sq. ft.	70 GPM	PH1150-6	1.5	3 ft. NEMA
520-5377-3S	FS02629	26"	3.5 sq. ft.	70 GPM	PH1200-3	2.0	3 ft. TL
520-5377-6S	FS02629	26"	3.5 sq. ft.	70 GPM	PH1200-6	2.0	3 ft. NEMA



807-0029.0212

2200 East Sturgis Road, Oxnard CA 93030 • Ph. 805.981.0262 • Fax 805.981.9403
waterway@waterwayplastics.com • www.waterwayplastics.com



©2012 Waterway Plastics



Carefree Series Filters and Supreme Pumps are also available as individual units to custom design filtration requirements for new or existing pools. Choose the appropriate pump as well as system enhancing accessories, such as optional automatic pump timer and chlorine feeders.

Deluxe Sand Filter Systems


Specifications

Filter type:	High-Rate Sand: No. 20 Silica
Filter tank:	Roto-Molded Polymeric
Underdrain:	360° self-cleaning, slotted laterals - threaded for ease of maintenance
Control Valve:	7-position, top-mount, multi-port with lever-action handle
Valve Fastening:	Split-nut thread design
Pump & Motor:	Supreme Series pump - 115 volts
Mounting Base:	Molded thermoplastic



Pump Timer with Stand

Above Ground
4-Tablet Chlorinator

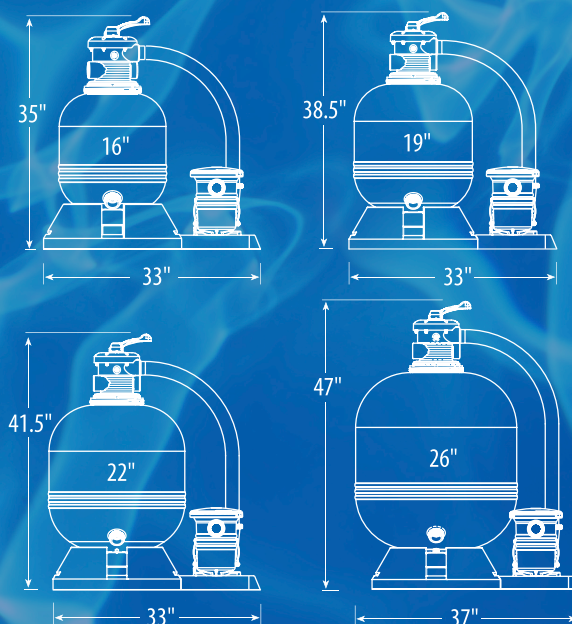

The Supreme Pump is the ultimate in above-ground pool engineering. Designed for today's more demanding applications, the Supreme Pump is ideal for DE, cartridge or sand filtration systems of any size.

- Features:**
- 1 1/2" Union threads / 1 1/2" FPT Intake
 - 2" Union threads / 1 1/2" FPT discharge
 - Extra large 7" pump trap with clear lid
 - Powerful side discharge performance
 - Wet end easily rotates



UL
LISTED
(SWIMMING POOL
OR SPA PUMP)
7J06

Waterway

807-0029.0212

2200 East Sturgis Road, Oxnard CA 93030 • Ph. 805.981.0262 • Fax 805.981.9403
waterway@waterwayplastics.com • www.waterwayplastics.com



©2012 Waterway Plastics