CORONA Lighting
WWW.CORONALIGHTING.COM

1633 Staunton Ave
Los Angeles, CA 90021
TEL.
(800) 727-9262
(213) 747-4500
FAX.
(800) 727-9957
(213) 747-3234

ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

PRODUCT # : CL-519B-AB

•Directional Lights   • Cast Brass

Fixture Specifications:

Housing & Shroud: Corrosion Resistant Cast Brass.

Finish: **AB- Antique Bronze**. Natural toning process. AB finish will vary due to artistic process.

Lens: Clear and heat resistant flat glass.

Socket: PAR-36 screw terminal.

Lamp: 12V, Par 36 50W Max. Available in 9W and 13W LED lamps available in spot and flood beam spreads in 2700K warm white temp.

Wiring: Fixture is prewired with a 3-ft 18-2 SPT2-W direct burial cord. Wire connector available seperately. Universal connector (**CX-839**) or silicone filled wire nut (**CX-854**) may be ordered to Corona Lighting.

Gasket: Silicone double gasketed for water tight sealing

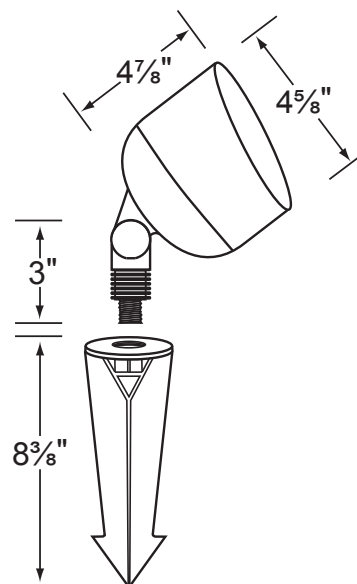**Knuckle:** Adjustable cast brass knuckle with thumb screw and ½" NPT threaded male hub on bottom.

Mounting Spike: Standard injection molded spike with ½" NPT threaded female hub.

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED lamps are 6V-32V.

Warranty: Limited lifetime warranty on fixture housing against manufacturer's defects.

4⅞"   4⅝"

3"

8⅜"

L E D

9W and 13W

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-ED36-9W-SP	9	15° Spot	730	2700K	50,000	35 Watt
L-ED36-9W-FL	9	45° Flood	730	2700K	50,000	35 Watt
L-ED36-13W-SP	13	15° Spot	850	2700K	50,000	50 Watt
L-ED36-13W-FL	13	45° Flood	850	2700K	50,000	50 Watt

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering a halogen lamp add lamp number to the product number. If you are ordering LED lamps you should follow the format below:

• **CL** - **product #** - **lamp** - **wattage** - **lamp angle**   Example: CL-519B-AB-L-ED36-9W-FL
CL - **519B-AB** - **L-ED36** - **9W** - **FL**

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.