

SPECIFICATION SHEET

PRODUCT # : CL-551B-AB

•Flood Lights

•Cast Brass

Fixture Specifications:

Housing: Corrosion Resistant Cast Brass.

Finish: **AB- Antique Bronze.**
Also available in **BK- Black Brass**

Lens: Removable Frosted Lens (Clear lens Included)

Socket: Top grade fixed ceramic bi-pin socket, with lamp retention clip to securely hold lamp in place

Lamp: 12V, T3 LED
Available in LED (2W & 2.5W) or without lamp.
See Lamp guide below for more information.

Wiring: Fixture is prewired with a 3-ft 18-2 SPT2-W direct burial cord. Wire connector sold separately.
Silicone filled direct burial wire nut (**CX-854**) and quick-locking connectors (**CX-LOC**) are available from Corona Lighting.

Gasket: Silicon gasket for water tight sealing

Knuckle: Adjustable cast brass knuckle with thumb screw and ½" NPT threaded male hub on bottom.


Mounting Spike: Standard injection molded spike with ½" NPT threaded female hub.

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting.
Voltage range for LED lamps are 8V-21V.
Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Ten (10) year warranty on fixture housing against manufacturer's defects.



2W and 2.5W

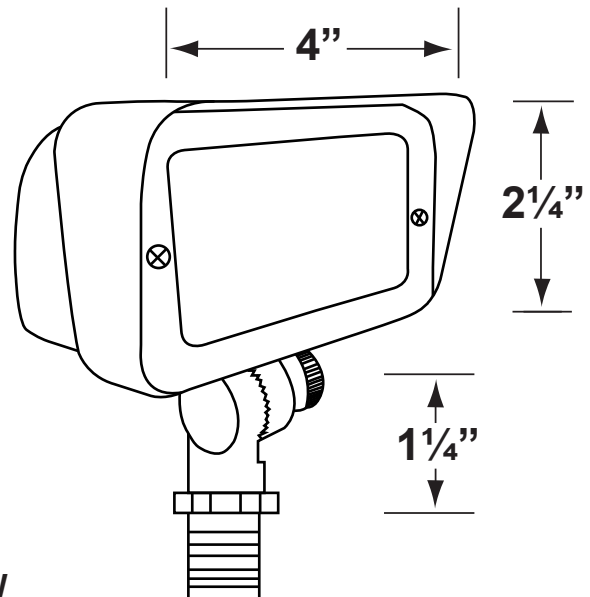

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDT3-2W	2	360°	200	2700K	25,000	20 Watt
L-EDT3-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDT3-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDT3-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDT3-AM*	2	360°	170	2000K	25,000	20 Watt

* AM- Amber color

For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering a halogen or xenon lamp add lamp number to the product number. If you are ordering LED lamps you should follow the format below:

• **CL** - **product #** - **lamp** - **wattage**

CL - 551B-AB - L-EDT3 - 2W-3K

Example: CL-551B-AB-L-EDT3-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ACCESSORIES SHEET


PRODUCT # : CL-551B-AB

• Flood Lights

• Cast Brass

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**

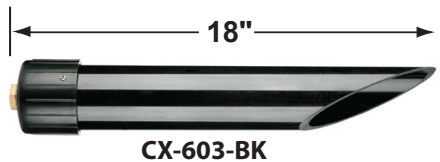

Ground Spikes


CX-644-BK 8 1/2" x 1/2" Slotted Plastic Spike, **Black**
(Included with fixture)



Cable Connectors

CX-854 Direct Burial Silicone Filled Wire Nut, **Tan**

CX-LOC Quick-locking gel filled wire connector
Two / Pack, **Tan**

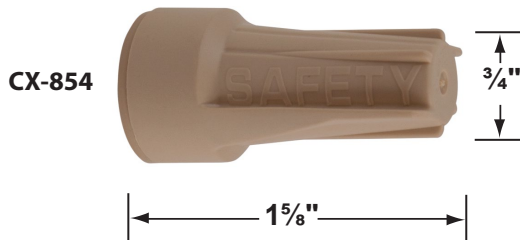


Mounting Risers

CX-682B-AB 6" Brass Riser, 1/2 NPT Male/Female, **Antique Bronze**

CX-683B-AB 12" Brass Riser, 1/2 NPT Male/Female, **Antique Bronze**

CX-684B-AB 18" Brass Riser, 1/2 NPT Male/Female, **Antique Bronze**

CX-685B-AB 24" Brass Riser, 1/2 NPT Male/Female, **Antique Bronze**

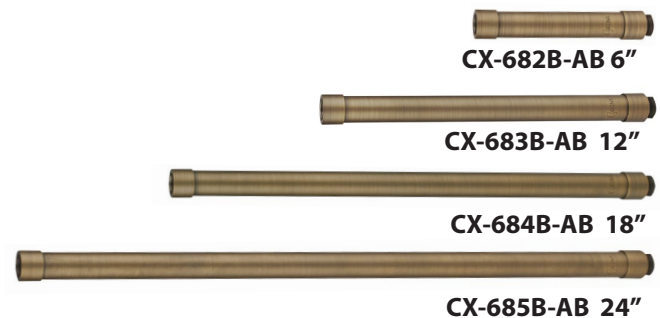

Mounting Canopies

CX-705B-AB Brass Flat Canopy, 1/2 NPT, **Antique Bronze**

CX-709B-AB Brass Raised Canopy, 1/2 NPT, **Antique Bronze**


CX-718B-AB 5" Brass Canopy, 3-Hole 1/2 NPT, **Antique Bronze**

CX-719B-AB Brass Tree Mounting Bracket, 1/2" NPT, **Antique Bronze**

CX-721-AB Brass Tree mount Canopy with 15" Rubber Strap stretches to 22", **Antique Bronze**


CX-722-AB Brass Tree mount Canopy with 22" Rubber Strap stretches to 33", **Antique Bronze**

CX-723-AB Brass Tree mount Canopy with 31" Rubber Strap stretches to 45", **Antique Bronze**

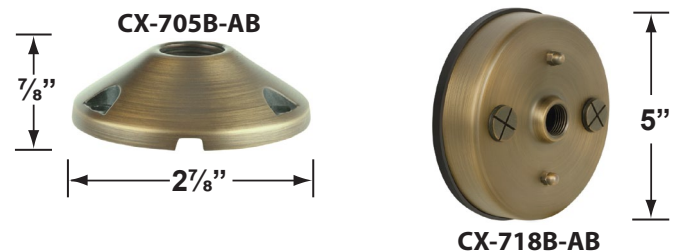

Dimmers

CX-DIM-100 100W, Low Voltage Dimmer Switch.
Use with T-LT Series Transformers, **Black**

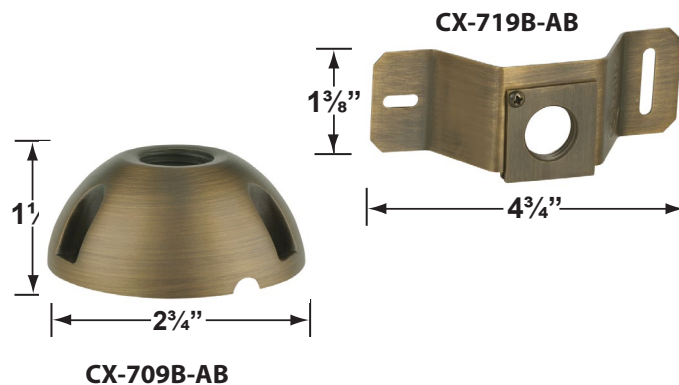

ACCESSORIES SHEET

PRODUCT # : CL-551B-AB


• Flood Lights

• Cast Brass

Mounting Posts For Sign Light & Path Light Applications

CX-678B-AB	24" Brass Single Head Post, Antique Bronze
CX-679B-AB	24" Brass Double Head Post, Antique Bronze
CX-690B-AB	18" Brass Single Head Post, Antique Bronze
CX-693B-AB	18" Brass Double Head Post, Antique Bronze

CX-718B-AB (Mounting Canopies pg 2) is required for sign light installation.

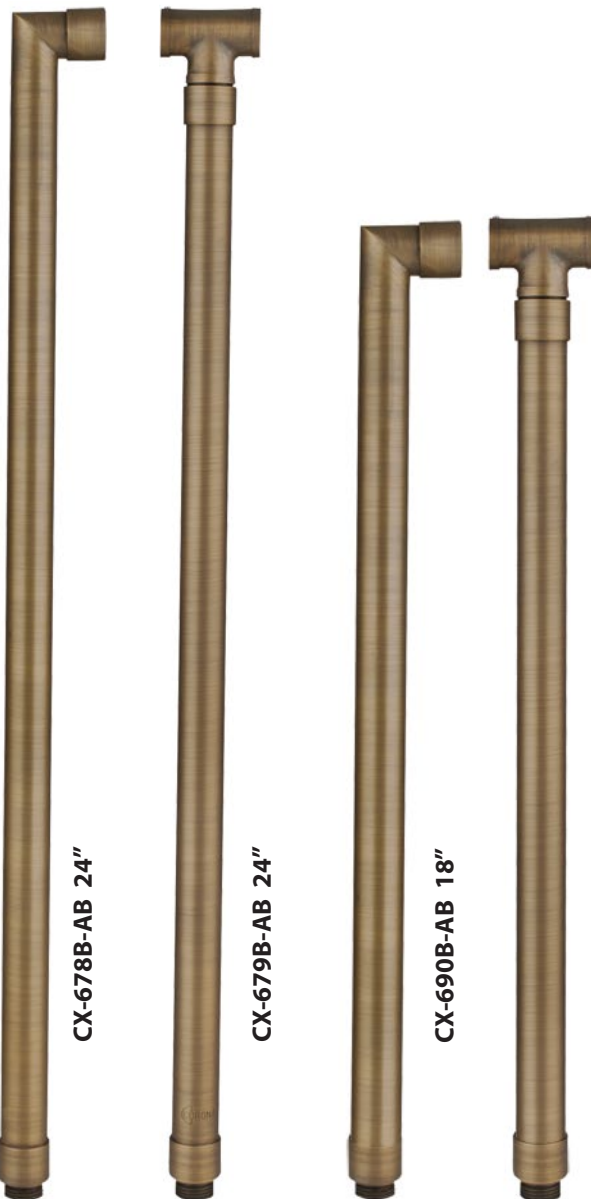

Stainless Steel Pool and Spa Rated Transformers

T-LTF60	60W, 12V, Compact Mini Transformer
T-LT75	75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
T-LT150	150W, 12-15V, Single Circuit Transformer.
T-LT300	300W, 12-15V, Single Circuit Transformer.
T-LT600	600W, 12-15V, Dual Circuit Transformer.
T-LT900	900W, 12-22V, Triple Circuit Transformer.
T-FIDT	Field Installed Plug-in Digital Timer.
T-FIT	Field Installed Plug-in Mechanical Timer.
T-TR-FIP	Field Installed Plug-in Photocell

