


X-Stream P-Series / X-Stream SOL P

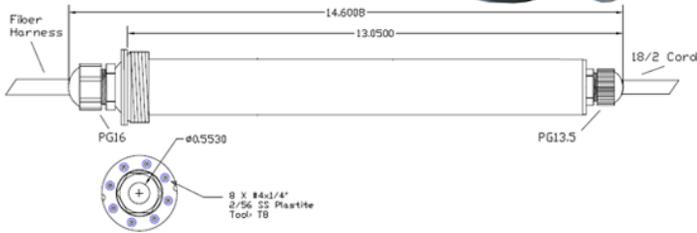

X-Stream SOL P

The SAVI X-Stream SOL P is a 28W RGB color LED driver for use with SAVI Lighted water features, like the X-Stream Falls, X-Stream Bubbler and X-Stream Celestial Floor Kit. It will accommodate up to 200 strands of fiber and is equipped with a 100 foot cord. Connect up to any Class 3 12VAC Transformer.

Works exclusively with PENTAIR® and ZODIAC® R-Series rev.1 Controls

Specifications: 28 Watts 12 VAC

PART NUMBER	DESCRIPTION
SAVI-XMS-DRIV100-P	P SERIES SOL X-Stream LED Driver, 100' - Requires 12V Transformer - ONLY FOR USE WITH P SERIES LIGHTS - COLOR
SAVI-XMS-DRIV150-P	P SERIES SOL X-Stream LED Driver, 150' - Requires 12V Transformer - ONLY FOR USE WITH P SERIES LIGHTS - COLOR

SUPPORT

- [INSTALL MANUAL](#)
- [OPERATING MANUAL](#)
- [X-STREAM SOL P LED DRIVER BROCHURE](#)
- [SAVI BROCHURE](#)

WHERE TO BUY

SAVI products are sold direct to the trade only. Homeowners should contact their pool builder, pool service provider, their local pool supply store or on-line retailers for SAVI products. Distributors and contractors please contact the factory for sales representative contact or distributor information.

