

10" ROUND ANTI-ENTRAPMENT SUCTION OUTLET COVER, SOLID RISER RING AND MUD FRAME



VGB CERTIFIED SPECIFICATIONS

Floor Flow Rating
166 GPM at 4.8 fps

Wall Flow Rating
96 GPM at 2.8 fps

Sump Depth
3" minimum

Open Area
11.2 in²

FEATURES

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Manufactured from superior UV-resistant engineered polymers

#316 stainless steel screws

Online product support including downloadable CAD files, General Certificate of Conformity, third-party certificate, installation instructions and more

Replace drain cover every five years from the date of installation

See next page for additional product configurations

8 per case



Part # 10AVRxxx




Fits: AquaStar standard 10" models and Color Match.
At least two mud frame screws must be used to secure the cover.

STANDARD COLORS

- ☐ 10AVR101 – White
- ☐ 10AVR102 – Black
- ☐ 10AVR103 – Light Gray
- ☐ 10AVR104 – Blue
- ☐ 10AVR105 – Dark Gray
- ☐ 10AVR108 – Tan

Also available as frame only
p/n 10FRxxx
24 per case

VGB 2008 Compliant

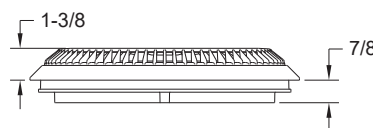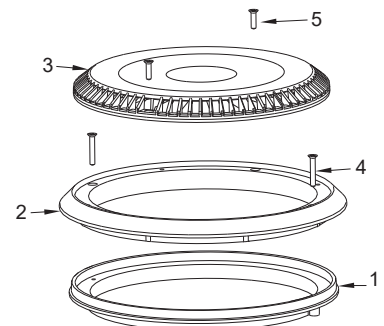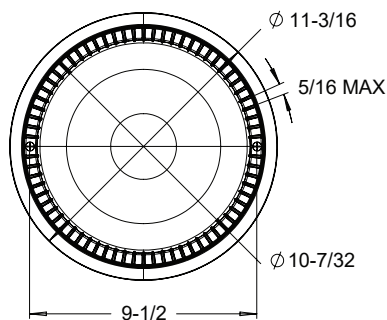

1. 10" Round Mud Frame
2. 10" Round Riser Ring
3. 10" Anti-Entrapment Suction Outlet Cover
4. 10 x 1-1/4" Flat-Head Phillips, 316 SS, Qty 2
5. 10 x 3/4" Flat-Head Phillips, 316 SS, Qty 2

P 877-768-2717 F 877-276-POOL Outside the US: P +1-949-336-1940 F +1-949-336-1940
info@aquastarpoolproducts.com www.aquastarpoolproducts.com

10" ROUND ANTI-ENTRAPMENT SUCTION OUTLET COVER WITH 6" SOCKET DEEP PVC SUMP



VGB CERTIFIED SPECIFICATIONS

Floor Flow Rating
166 GPM at 4.8 fps

Wall Flow Rating
96 GPM at 2.8 fps

Sump Depth
3" minimum

Open Area
11.2 in²

FEATURES

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Manufactured from superior UV-resistant engineered polymers

No transitional glue required

Comes with 6" tapered threaded pipe plug for easy pressure testing and winterization

#316 stainless steel screws

Online product support including downloadable CAD files, General Certificate of Conformity, third-party certificate, installation instructions and more

Replace drain cover every five years from the date of installation

1 per case





Part # 10AVRxxxF

STANDARD COLORS

- ☐ 10AVR101F – White
- ☒ 10AVR102F – Black
- ☐ 10AVR103F – Light Gray
- ☐ 10AVR104F – Blue
- ☐ 10AVR105F – Dark Gray
- ☐ 10AVR108F – Tan

VGB 2008 Compliant

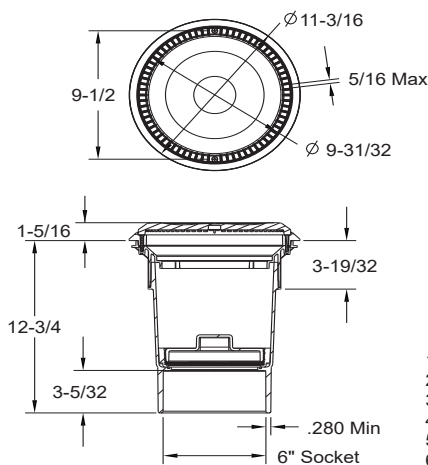

1. 6" Socket Deep PVC Sump
2. 6" Tapered Threaded Pipe Plug
3. 10" Round Riser Ring
4. 10" Anti-Entrapment Suction Outlet Cover
5. 10 x 1-1/4" Flat Head Phillips, 316 SS, Qty 4
6. 10 x 3/4" Flat Head Phillips, 316 SS, Qty 2

P 877-768-2717 F 877-276-POOL Outside the US: P +1-949-336-1940 F +1-949-336-1940
info@aquastarpoolproducts.com www.aquastarpoolproducts.com