

Wet Rotor Waterfall Pumps

Our highflow, wet rotor pumps are durable, reliable and use between 40-60% less electricity than their direct drive counterparts. Because of their flow capabilities and simplistic operations, they are the perfect choice for waterfalls, streams, ponds, fountains and water displays. They are cULus listed, come with a 20' power cord and can be installed inline after removing the bottom screen.




PWM2600

- 1-1/2" FNPT Discharge
- 1-1/2" Adapter Included
- 20' Power Cord
- cULus Listed
- Efficient PSC Motor



PWM3900

- 1-1/2" FNPT Discharge
- 1-1/2" Adapter Included
- 20' Power Cord
- Shown with optional TS1.5 filter (not included)
- cULus Listed
- Efficient PSC Motor

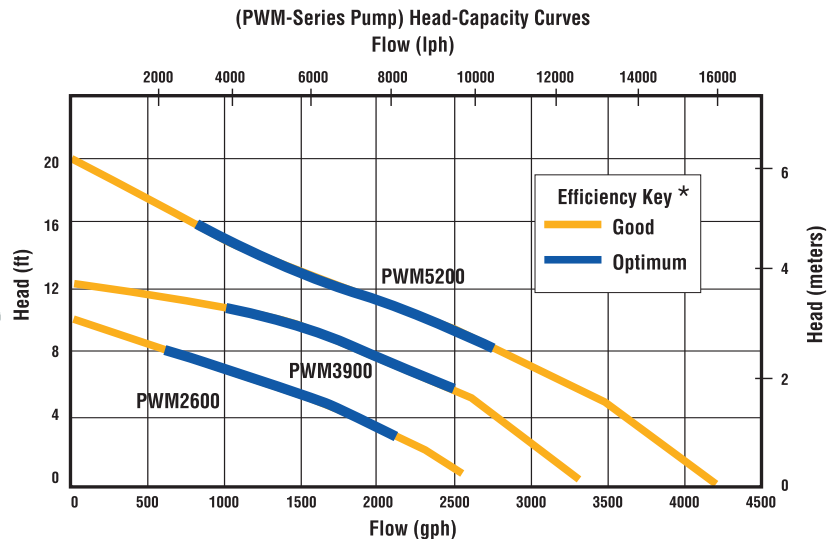

PWM5200

- 1-1/2" FNPT Discharge
- 1-1/2" Adapter Included
- 20' Power Cord
- cULus Listed
- Efficient PSC Motor



Model	Amps	Watts	Max Flow	Max Ht.	1'	5'	10'	15'
PWM2600	1.8	155	2640	10'	2550	1530	-	-
PWM3900	2.4	280	3300	13'	3300	2460	1500	-
PWM5200	5	410	4080	20'	4080	3480	2520	1115

* Efficiency key illustrates where pump is most energy efficient.