
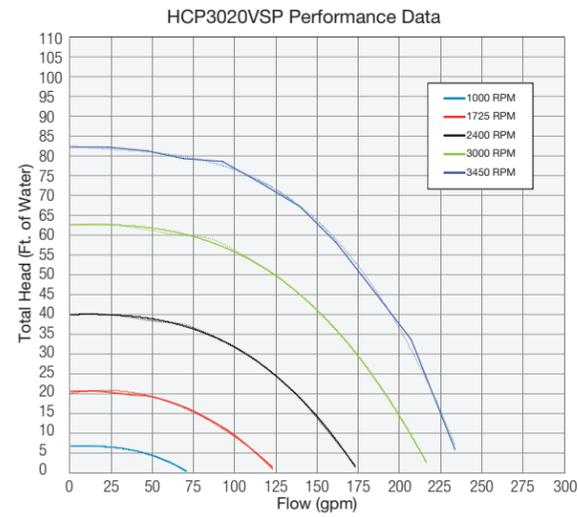



PERFORMANCE DATA

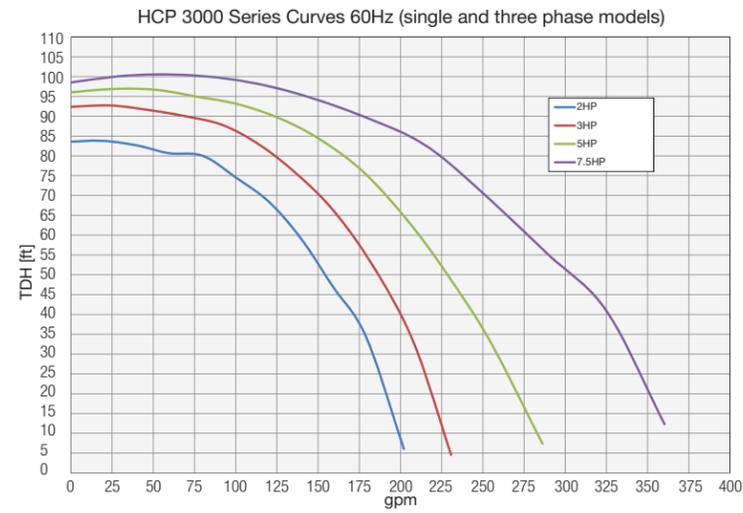

PUMP OUTPUT (GPM) VS. TOTAL RESISTANCE TO FLOW (PER FT OF HEAD)

Part Number	HP	Flow Rate (GPM)					
		40	50	60	70	80	90
HCP30201 / HCP30203	2.0	165	150	135	115	80	—
HCP30301 / HCP30303	3.0	200	185	160	140	100	—
HCP30501 / HCP30503	5.0	230	215	195	165	140	110
HCP30703	7.0	335	310	280	260	225	185

DIMENSIONS

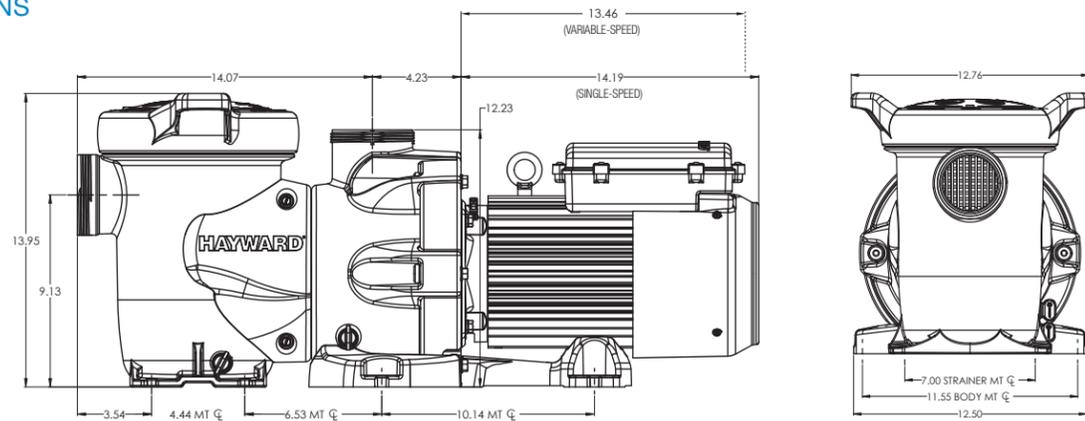

Hayward Commercial
 10101 Molecular Dr. | Suite 200 | Rockville, MD 20850
 Visit us at: www.haywardcommercialpool.com

Hayward Commercial is ready to jump in:
1.800.657.2287. Our toll-free line will put you in direct contact with an experienced, technical, commercial products specialist. We're here to serve you.

Total System: **Pumps** | Filters | Heating | Cleaners | Sanitization | Automation | Lighting | Safety | White Goods | Flow Control



Hayward® Commercial Pool Products

HCP 3000 Series

HIGH PERFORMANCE
 COMMERCIAL POOL PUMPS
 2-7 HP

COMMERCIAL PUMPS



Industry-leading performance, versatility and efficiency

Unrivaled power, unmatched efficiency.

The HCP 3000 Series pumps are game changers in commercial pump performance and versatility. Engineered for heavy-duty durability, they set a new standard of flow rate for the 3" union class. A wide range of power options, including single or variable speed, means you can provide the optimum solution for virtually any pool, delivering maximum performance and uncompromised efficiency.

- **Best-in-class performance.** HCP 3000 Series pumps are the first 3" pumps to achieve hydraulic efficiency of more than 250 gallons per minute at 60' head (7 HP model), saving more energy than any comparable pump on the market.
- **Longer life and lower maintenance.** TEFC motors in all models—plus a chemical-resistant Viton® seal—mean less wear-and-tear and dramatically reduced down-time. Oversized strainer baskets reduce daily cleaning and maintenance.

- **Simple, versatile installation.** The wide variety of power options and the detachable, modular strainer basket mean HCP 3000 Series pumps deliver unmatched versatility, allowing for simple installation in virtually any pool application.



3" ANSI Standard flanged connection allows strainer basket to be removed and mounted remotely



Variable-Speed Model



The digital control interface can be rotated on the pump or detached and wall-mounted for convenient access and viewing.



TECHNICAL SPECIFICATIONS

Part Number	Rated Horsepower	Voltage	Rated Current (Amps)	Carton Quantity	Carton Weight (lbs.)
HCP3020VSP	2.7	230V Single Phase, Variable Speed	10.9	1	64
HCP30201	2.0	208-230V Single Phase, Single Speed	8.7-7.9	1	90
HCP30301	3.0	208-230V Single Phase, Single Speed	11.7-11.5	1	95
HCP30501	5.0	208-230V Single Phase, Single Speed	21.0-20.0	1	100
HCP30203	2.0	208-230/460V Three Phase, Single Speed	7.8-7.6/3.8	1	90
HCP30303	3.0	208-230/460V Three Phase, Single Speed	9.2-9.0/4.5	1	95
HCP30503	5.0	208-230/460V Three Phase, Single Speed	13.6-13.2/6.6	1	100
HCP30703	7.0	230/460V Three Phase, Single Speed	17.2-8.6	1	105