

**18" SQUARE FRAME WITH FOUR 9" SQUARE
WAVE ANTI-ENTRAPMENT SUCTION OUTLET COVERS
AND VENTED RISER RINGS**

VGB Series

The AquaStar line of suction outlet covers, compliant with the Virginia Graeme-Baker Pool and Spa Safety Act (ANSI/APSP 16-2011 and NSF/ANSI 50-2009a)

FEATURES

For single or multiple drain use
6" minimum sump depth
(see installation instructions)

Single –

Floor/wall: 628 GPM at 1.1 fps

Floor/wall: 826.6 GPM at 1.5 fps

Floor/wall: 551.1 GPM at 1.0 fps

When 1.0 or 1.5 fps installations are not required, always use the lower tested flow rate

176.8 square inch opening

Trademarked VGB compliance button easily identifies VGB 2008 compliant cover from on deck and underwater

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers


Easily and safely retrofits to 18" square 3/4" deep frames

All components (covers, frame, screws) meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Replace every five years from the date of installation

4 per case

U.S. patents D623727 and D663388

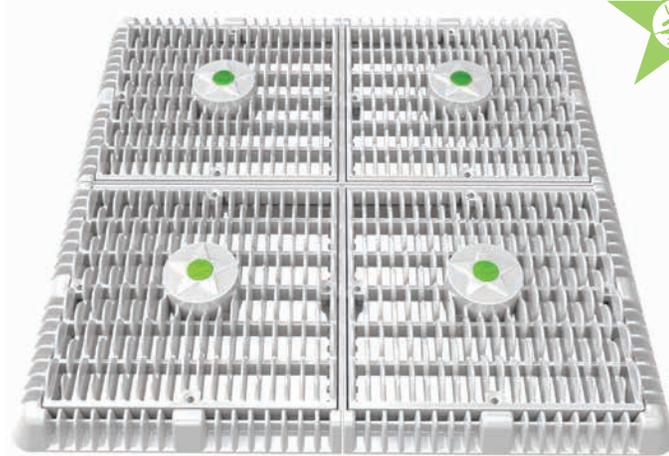

Part # WAV18WRxxx

Grates fit: AquaStar (standard 18" square frames); Pentair (#1 selling) with 3/4" deep existing window grid frame and 4x4 screw hole pattern

STANDARD COLORS

- WAV18WR101 – White
- WAV18WR102 – Black
- WAV18WR103 – Light Gray
- WAV18WR104 – Blue
- WAV18WR105 – Dark Gray
- WAV18WR108 – Tan

Also available with four grates only for 3/4" deep retrofits
p/n WAV18WRNFxxx

VGB 2008 Compliant

