

12" SQUARE MOFLOW® SUCTION OUTLET COVER AND MUD FRAME



**VGBA CERTIFIED
SPECIFICATIONS**

Open Area
71.2 in²

For SOFA Specific Flow Ratings and
specifications please scan QR code or visit
www.aquastarpoolproducts.com/flowcode



FEATURES

Certified, Listed, and Labeled in
conformance with APSP/ANSI/ICC-16 2017
and NSF/ANSI/CAN 50 standards

Easily and safely retrofits to 12" square
¾" deep frames

#316 stainless steel screws

Manufactured from superior UV-resistant
engineered polymers

Trademarked VGBA compliance button
easily identifies VGBA 2017 compliant cover
from on deck and underwater

Online product support including
downloadable CAD files, General Certificate
of Conformity, third-party certificate,
installation instructions and more

Replace drain cover every five years from
the date of installation

See next page for additional product
configurations

6 per case





Part # 12MFxxx

Designed to replace standard 12" square covers
that have a 11¼" center-to-center screw hole
measurement with ¾" deep existing frames

STANDARD COLORS

- ☐ 12MF101 – White
- ☐ 12MF102 – Black
- ☐ 12MF103 – Light Gray
- ☐ 12MF105 – Dark Gray
- ☐ 12MF108 – Tan

VGBA 2017 Compliant

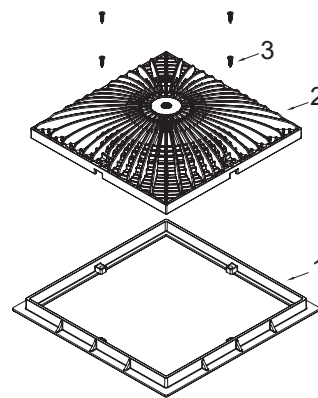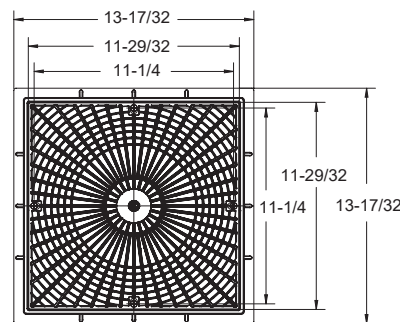

1. 12" Square Mud Frame
2. 12" Square MoFlow Suction Outlet Cover
3. 10 x .75" Flat Head Phillips Screw, 316 SS, Qty 4

P 877-768-2717 F 877-276-POOL Outside the US: P +1-949-336-1940 F +1-949-336-1940
info@aquastarpoolproducts.com www.aquastarpoolproducts.com CS005-013125


6" Socket Deep PVC Sump

NSF



Certified to
NSF/ANSI/CAN 50
ANSI/APSP/ICC-16 2017

Open Area
71.2 in²

For SOFA Specific Flow Ratings and
specifications please scan QR code or visit
www.aquastarpoolproducts.com/flowcode



Part #
12MFxxxF
1 per case

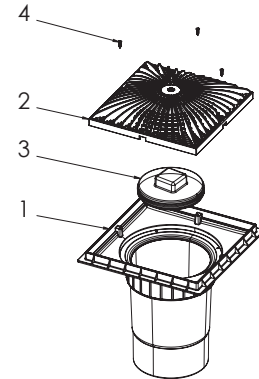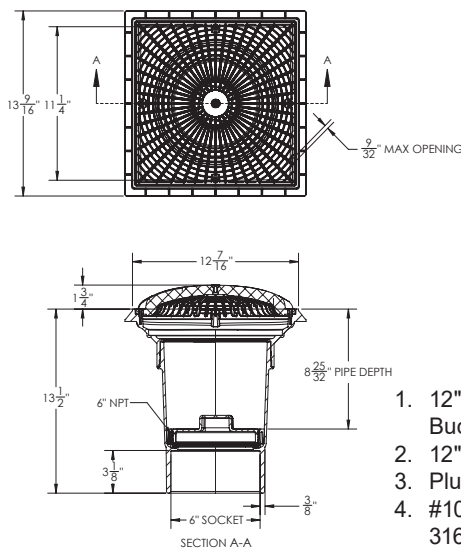

1. 12" Round Double Deep PVC Sump Bucket with 6" Socket
2. 12" Square MoFlow Suction Outlet Cover
3. Plug, 6" NPT
4. #10 x .75" Flat Head Phillips Screw, 316 SS, Qty 4

3" Socket x 4" Spigot Side Port PVC Sump

NSF

Certified to
NSF/ANSI/CAN 50
ANSI/APSP/ICC-16 2017

Open Area
71.2 in²

For SOFA Specific Flow Ratings and
specifications please scan QR code or visit
www.aquastarpoolproducts.com/flowcode





Hassle-free pressure testing
and winterizing



Part #
12MFxxxSSB
1 per case

Hassle-free pressure testing and winterizing
Comes with a 3" and 2" NPT cap with O-ring.
No knock-outs required.
For replacement plug kit p/n SSBPK

NEW
Optional 2" hydrostatic relief valve available p/n HVK101

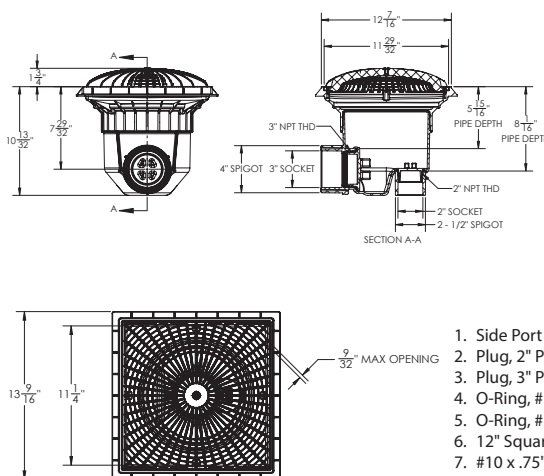

1. Side Port Sump Bucket, 12" Square Frame
2. Plug, 2" Pipe THD.
3. Plug, 3" Pipe THD.
4. O-Ring, #340, 3.35" ID x .21" THK., EPDM
5. O-Ring, #228, 2.25" ID x .125" THK., EPDM
6. 12" Square MoFlow Suction Outlet Cover
7. #10 x .75" Flat Head Phillips Screw, 316 SS, Qty 4