

inverFLOW^{PLUS}



RAISING THE STANDARD OF POOL PUMPS

Madimack's inverFLOW Plus redefines reliability and innovation in pool pump technology. Backed by an industry-first 5-year warranty, this variable speed inverter pump delivers outstanding energy efficiency, whisper-quiet operation and smart features for years of hassle-free performance. Enjoy skimmer mode, WiFi remote control and a compact, space-saving design. Retrofit-ready for most major brands, the inverFLOW Plus seamlessly retrofits to existing plumbing, no extra pipework required.



Trusted by
POOL PROFESSIONALS



InverMAC Technology

Automatically adjusts motor speed for optimal performance and energy savings



Wi-Fi enabled + App control

Remote operation, scheduling, and monitoring from your phone



Retrofit Ready

Direct replacement for existing pumps - no plumbing changes needed for common brands



Skimmer Mode Function

Enables surface skimming for cleaner surfaces and optimal debris removal



Quiet operation (36dB)

Significantly reduces noise for a more peaceful backyard environment



5-year Replacement Warranty

Long-term peace of mind and product reliability



Compact design

Fits into tight equipment spaces with ease




madimack

Powered by




TECHNICAL PARAMETERS

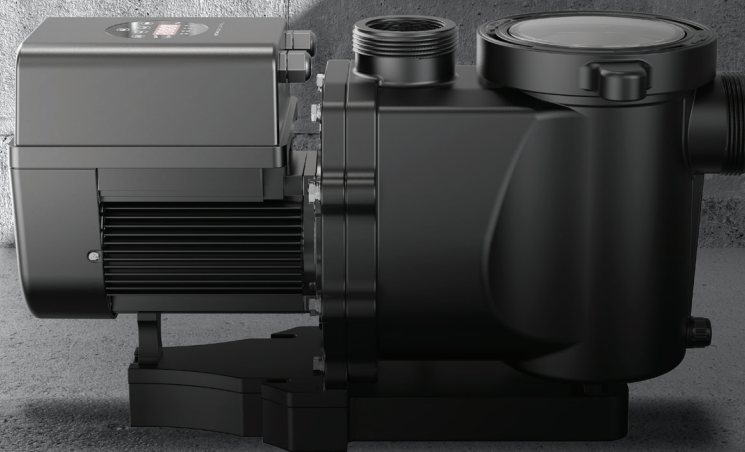


MODEL	InverFlow Plus 1HP	InverFlow Plus 1.5HP	InverFlow Plus 2HP
SKU	20101	20102	20103
Power			
Voltage range	220~240 50/60Hz		
Horse Power (HP)	1	1.5	2
Input kilowatt (kW)	0.75	1.05	1.5
Running Amps (A)	3.5	4.6	6.5
Flow			
Qmax L/Min	367	425	517
Hmax - Metre	16	18	20.5
Flow @ 8m (L/min)	300	367	500
Flow @ 10m (L/min)	233	300	467
Specifications			
Dimensions LxWxH (mm)	544*252*288		
Pipe connections (mm)	40 & 50mm		
Noise level 30% Speed	35.4	35.4	36
Noise level 100% Speed	51.4	54.9	57.5
Packaging (mm)	610*255*348		

* Specifications displayed refer to 230v supply and can vary with voltage fluctuations please visit www.madimack.com for further specifications.
2 years warranty for product installed in commercial application

inverFLOW PLUS 1HP

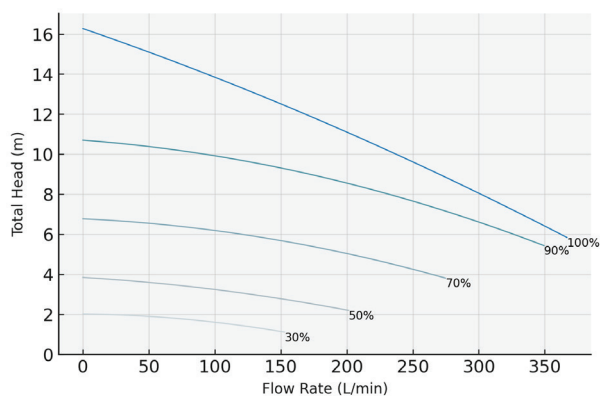

inverFLOW PLUS 1.5HP

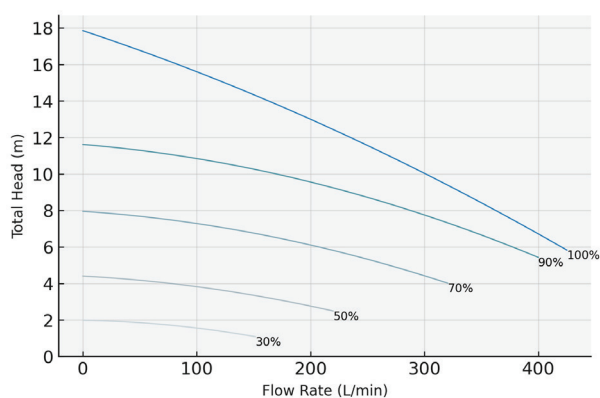

inverFLOW PLUS 2HP

