

# GUADALUPE WALL LIGHT




## DESCRIPTION

The Guadalupe is an integrated lamp and fixture that casts light from wall-mount applications in outdoor living areas. We recommend using LightingShrink connections for the Guadalupe. Dimmable with Brilliance dimmer and most magnetic transformers. UL Certified E511083.

## GUADALUPE WALL LIGHT


Use	<b>Walls, Fence Posts, Around Pools, and Other Outdoor Living Areas</b>	
Finish	<b>Brass or Blackened Brass</b>	
Includes	<b>12 ft Lead, 2 #8 Mounting Screws for Wood or Sheet Metal, Mounting Template</b>	
Integrated Lamp	<b>2700K, 3.8W, 200 Lumens, 90°, CRI 80, IP65, 8-15VAC, 3 year warranty, 6.03VA, 35,000 hrs</b>	
	<b>Brass</b>	GUADALUPE-2700-BR
	<b>Blackened Brass</b>	GUADALUPE-2700-BR-BLK
	<b>3000K, 3.8W, 210 Lumens, 90°, CRI 80, IP65, 8-15VAC, 3 year warranty, 6.03VA, 35,000 hrs</b>	
	<b>Brass</b>	GUADALUPE-3000-BR
	<b>Blackened Brass</b>	GUADALUPE-3000-BR-BLK



Brass (BR)



Black Brass (BR-BLK)

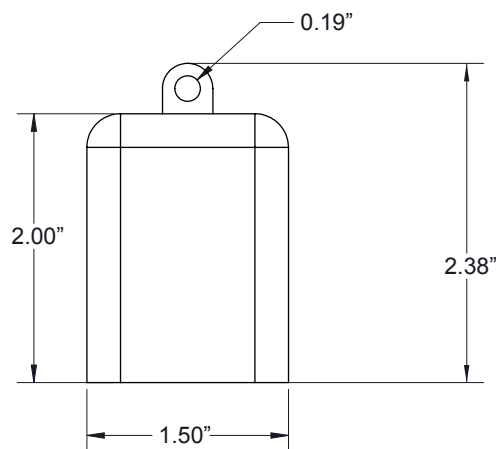



**GUADALUPE-BR-BLK-3000**

#### **INSTALLING THE FIXTURE**

1. Using a torpedo level and the mounting template provided, align and mark the screw and cable holes.
2. Drill the appropriate holes for the building materials to which the fixture will be mounted. Pre drill if necessary.
3. Insert and thread in the bottom mounting screw.
4. Pass the fixture cable through the larger center hole.
5. Hang the fixture on the bottom screw.
6. Align the top mounting tab with the top pilot hole and insert the mounting screw.
7. Tighten the top mounting screw until snug and then finish tightening the bottom screw until snug.
8. Connect the fixture wires to the main cable coming from the transformer.