

BISTRO 12 VOLT STRING KIT

DESCRIPTION


A great addition to any outdoor lighting job, bistro lights add a touch of elegance and ambience for entertaining, the Brilliance Bistro 12 Volt String Kit comes in 26 ft., 52 ft, 98 ft and 150 ft kit options. Use this low voltage bistro string with the corresponding low voltage string connection accessories for custom length bistro lighting. This string is for use with low voltage lamps only. Dimmable with Brilliance Dimmer and most magnetic transformers. Each kit includes bistro string, and hanging kit. Lamps and connector accessories sold separately.

BISTRO 12 VOLT STRING KIT FEATURES

- Patented design (U.S. Patent D898986S)
- Uses 14 AGW cable and features a waterproof seal
- Two-way mounting holes at each lamp position eliminate the need for zip ties and creates a more secure installation for the life of the string lights
- **Fully dimmable**



NEC® Article 411.5 (B): Lighting systems shall be installed not less than 3m (10ft) horizontally from the nearest edge of the water, unless permitted by Article 680.

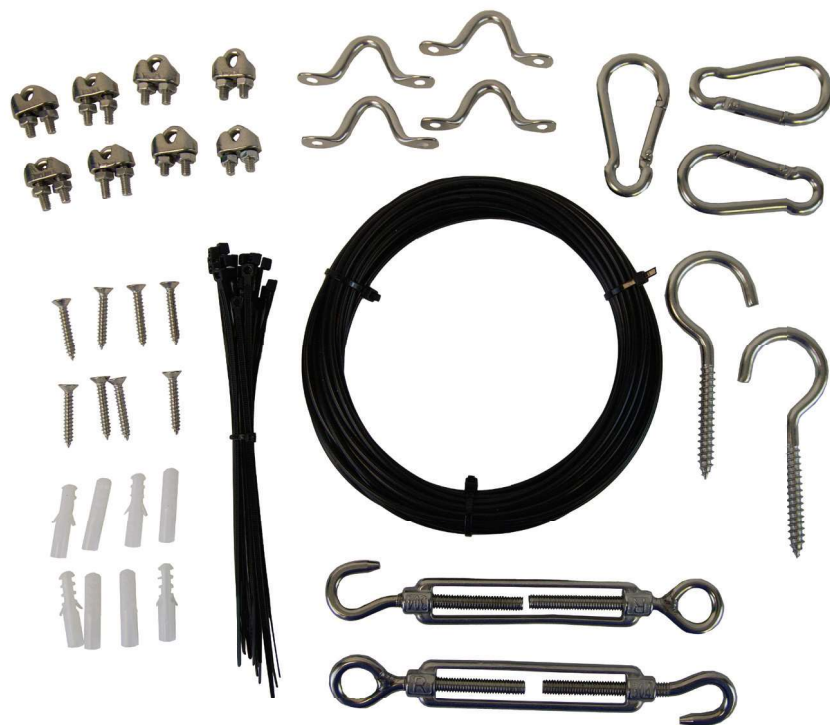

Two-way mounting holes



BISTRO 12 VOLT STRING KIT SPECS

Operating Range	12VAC			
Total Length	26 ft, 50 ft, 98 ft or 150 ft			
String Lead Length	At least 10 inches of lead required for connections			
Distance Between Lamp Positions	24 inches between lamps			
Connection Accessories Available	Straight Connector: 1 per cable conversion T Connector: 1 per center feed End Cap: 1 per string end			
Includes	Low Voltage Bistro String (14 AWG)			
Item	26' Kit	50' Kit	98' Kit	150' Kit
Sockets	12	24	48	74
String length (in feet)	26	50	98	150
Hanging Kit				
Cable Length (in feet)	56'	56'	156'	156'
Turnbuckles	2	2	4	4
Wire Clamps	8	8	16	16
Zip Ties	25	25	50	50
Hooks	2	2	4	4
Plastic Anchors	8	8	16	16
Screws	8	8	16	16
Carabiners	4	4	8	8
Guides	4	4	8	8
Warranty (years)	2			



Part Numbers:

BISTROKIT-26-12V-NL

BISTROKIT-50-12V-NL

BISTROKIT-98-12V-NL

BISTROKIT-150-12V-NL

S14 LAMP REQUIREMENTS

Lamp	1W, 12VAC	2W, 12VAC	3.5W, 12 VAC
Max. # of Lamps	75	50	30
Max. Wattage	125.25 with VA	117.5 with VA	117.9 with VA
Max. String Length	150 ft end-to-end	100 ft end-to-end	60 ft end-to-end