

TEL.

FAX.

(800) 727-9957

(800) 727-9262 (213) 747-4500

(213) 747-3234



Faceplate:

SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

PRODUCT #: CL-344B-AB

Step Light

Mounting:

Electrical Notes:

Cast Brass

Fixture Specifications:

ARCHITECTURAL GRADE SERIES

Housing: Heavy Duty Corrosion Resistant Cast Brass.

Diecast brass faceplate with frosted lens, fitted to

stainless steel backplate.

Finish: AB- Antique Bronze. Natural toning process.

AB finish will vary due to artistic process.

Also available in: GM- Gun Metal & SI- Silver Plated

Lighting Removable 2.5W LED module, 250 lumens, 3000K, Source: 20W halogen equivalent. Rated hours: 30,000

Wiring: Fixture is prewired with a 25 ft SPT2-W direct burial

> cord, pre-stripped for easy connection. Wire connector sold seperately. Universal connector (CX-839), silicone filled wire nut (CX-854) or quick locking wire connector (CX-LOC) are available from

Corona Lighting.

concrete, brick, or other masonry surfaces. Two

screws and two anchor bolts are provided. Removable LED module is dimmable. A remote 12V

Surface mounted on walls or steps. Best used on

magnetic transformer is required. Options are available from Corona Lighting. Not for use with

electronic transformers. Voltage range for LED module is: 8 -15Volt AC

Ambient temperature: -40°F to 124°F. CRI: Ra > 80 Proper grease/lubricant is suggested on threaded parts during installation process. Increasing voltage above 12 volts AC may decreased life of LED cores.

Dimensions: 51/2" (Width) x 21/2" (Height) x 1/2" (Depth)

Warranty: Limited lifetime warranty on fixture housing and


faceplate against manufacturer's defects. Ten (10) year warranty on removable LED module.






LIFETIME WARRANTY

INTEGRATED



Template of backplate NO BACKBOX REQUIRED

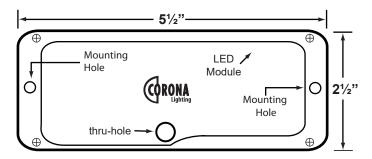

NOTE: This is the back of the Fixture. Looking from the front of the fixture the positions of through-hole and other details are reversed.

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:



ARCHITECTURAL GRADE SERIES

ACCESSORIES SHEET

1633 Staunton Ave Los Angeles, CA 90021

TEL. FAX. (800) 727-9262 (800) 727-9957 (213) 747-4500 (213) 747-3234

E-Mail: sales@coronalighting.com

PRODUCT #: CL-344B-AB

Step Lights

Cast Brass

Cable Connectors

CX-854 Direct Burial Silicone Filled Wire Nut, Tan

CX-858 Speedy Cable Connector, Supply Cable up to 10-2, Black

CX-839 Universal cable connector, Supply cable up to 8-2,

one/Pack Black

CX-LOC Quick-Locking Silicone Filled Wire Connector, 25 Sets (50

per Pack)

