

SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

PRODUCT # : CL-MINI-BK

• Specialty Lights

• Cast Brass

Fixture Specifications:

Housing: Corrosion resistant cast brass

Finish: BK-Black Brass

Lighting Source: Integrated LED module, Wattage: 3W, Beam Spread: 45°. Light Output: 230 Lumens
Color Temperature 2700K/3000K adjustable with Switch button.

Wiring: Fixture is prewired with a 10ft SPT-1W wire. Wire connector sold separately.
Quick-locking connectors (**CX-LOC**) are available from Corona Lighting.

Mouting: Optional 6" stainless steel stake

Rating IP68

Applications: Suitable for fountains, ponds, waterfalls, stone lanterns, rock beds, underneath steps, etc. Any place a small beam of light is needed. Do not use in Swimming pools, lakes or spas.
Glare shield & optional stake are included.


Electrical Notes: 3W LED is dimmable. A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers. Voltage range for LED module is: 9-17V
Ambient temperature: -22°F to 176°F CRI: >85
Proper grease/lubricant is suggested on threaded parts during installation process.

Dimensions: 1 1/4" W x 7 1/4" L

Warranty: 10 year warranty, with a rated life of 50,000 hours.




10 YEAR
WARRANTY

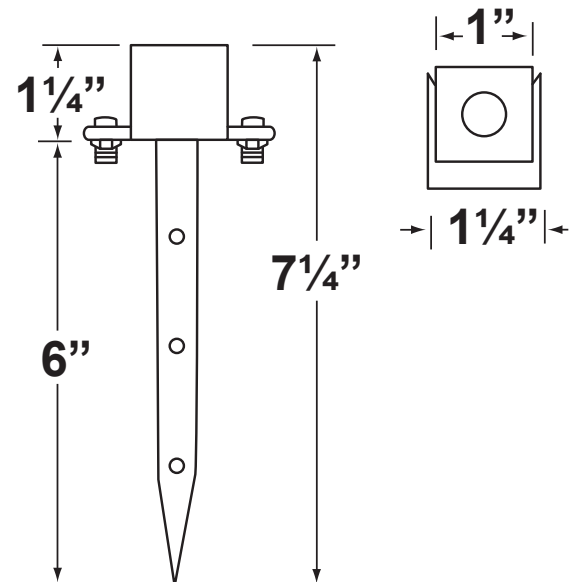

Wire Connectors

CX-854 Direct Burial Silicone Filled Wire Nut, Tan

CX-LOC Quick-locking gel filled wire connector
Two / Pack, Tan

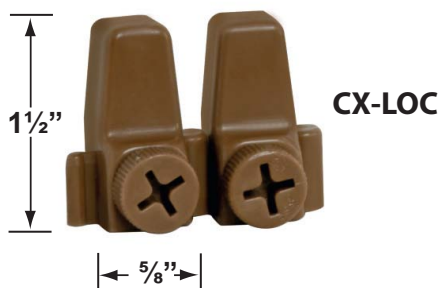

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ACCESSORIES SHEET


PRODUCT # : CL-MINI-BK

• Specialty Lights

• Cast Brass

Stainless Steel Pool and Spa Rated Transformers

- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell

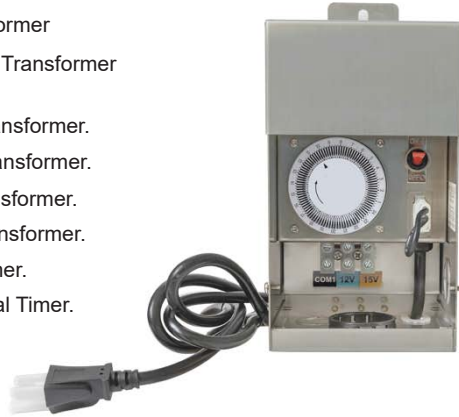

T-LT75



T-LT150



T-FIDT



T-LT300



T-TR-FIP