



# RETANI® STRAIGHT R812

Product Number #827

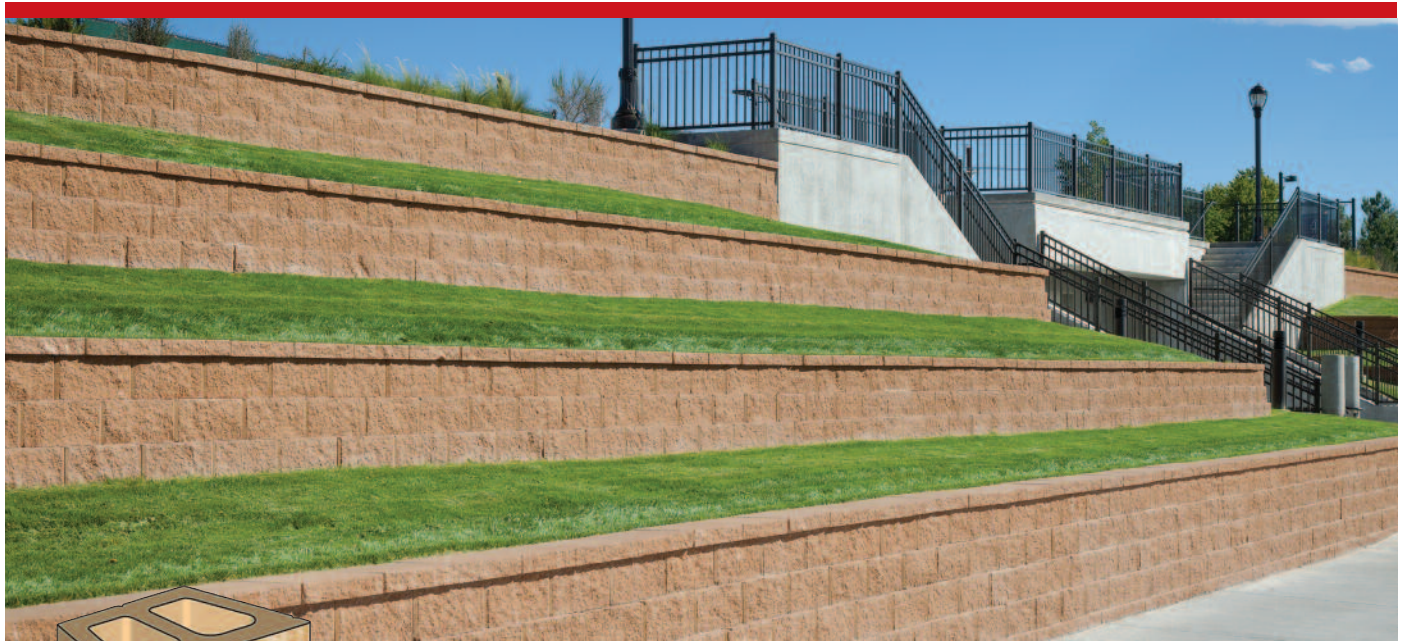


- Traditional straight split creates a clean, natural look
- Rear lip ensures proper alignment and precise setback

Compare to Anchor™ Diamond Pro® Retaining Wall System, Straight Face

## TRUSTED BLOCK NEW NAME

RETANI® Straight R812 block dimensions, weights, and block-to-block and block-to-grid interfaces match those of Anchor™ Diamond Pro® Retaining Wall System. The blocks are made to the same specifications using the same molds, mix designs, and drycast and splitting processes. RETANI® is a trademark of The Quikrete® Companies, Inc. Quikrete® is a registered trademark of The Quikrete® Companies, Inc. Diamond Pro® and Anchor™ are registered trademarks of Anchor™ Wall Systems, Inc. The Quikrete® Companies, Inc. is not affiliated with Anchor™ Wall Systems, Inc.

<b>BLOCK</b>	Height in.	8	<b>WALL</b>	Batter	7.1°
	Depth in.	12		GWH*	4.0 ft.
	Width in.	18.6		R in	6 ft.
				R out	4 ft.
	Units ea.		<b>PALLET</b>		36
	Coverage F. ft.	1.03			37.2
	Weight lbs. (Approximate)	76			2,736 (Excludes Pallet)

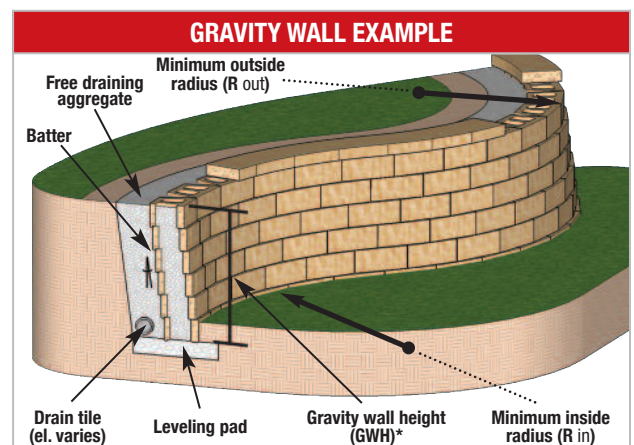

\*Requires: (1) voids filled with drainage aggregate, (2) level, clean, and compacted sand/gravel backfill, and (3) no surcharge. Taller reinforced walls are possible when designed by a qualified engineer.

