



Product Specifications - Written

Product Name: 30" Deluxe Starting Platform

Part Number: A41796-1

General Notes:

The **30" Deluxe Starting Platforms** are designed for use on competitive pools. All tubing components are 316 series polished, stainless steel. The included anchors allow for quick platform removal so that additional starting platforms may be readily installed. All the supplied hardware is also stainless steel.

Application:

Depending upon installation design and local codes, this model is suitable for use on competitive pools. The deck to water level dimension should be noted to assist with ordering.

Specifications

- 1 Platform: The platform is constructed of an acrylic outer body skin and a non-slip, sanded tread over a solid laminated board covered with hand-laid fiberglass and resin roving. The platform is mounted onto the weldment and slopes at a 10° angle. The platform dimensions are 22" x 22 (558.80mm x 558.80).
- 2 Step: The step is constructed of stainless steel with nominal dimensions of 3" x 20 (76.2mm x 508). The step frame has a replaceable, black, non-skid tread insert.
- 3 Frame: The frame is constructed of 1.90" O.D. x .065 wall (48.26mm x 1.65), 316 series polished stainless steel. The backstroke bar is 1.00" O.D. x .065 wall (25.4 mm x 1.65) 316 series stainless steel and is fastened to the side rails flush with the front of the platform. All hardware securing the frame is also stainless steel.
- 4 Anchor Plate: The anchor plates are a heavy-duty brass casting that has been chrome plated. The plates engage with the flush anchors for quick setup and breakdown.
- 5 Anchors (p/n A41659-0, see spec sheet for SRS-904): The flush anchor sockets are brass castings and are chrome plated. Also included are two 1/2" dia. anchor bolts, two cover screws, and two brass 10-24 x 3/8" UNC bonding screws with washers.

Additional Product Numbers: N/A

Shipping weight: 49 lbs (22.23 kg)



Specification Number:	SRS-303		S.R. Smith, LLC P.O. Box 400, 1017 SW Berg Parkway Canby, Oregon 97013 Tel: (800) 824-4387 (503) 266-2231 Fax: (503) 266-4334 www.srsmith.com
Product Description:	30" Deluxe Starting Platform		
S.R. Smith Part Number:	A41796-1		
Revision:	B	Date: 08/08/13	
Written By:	T. Weil	Date: 04/21/03	
Approved By:	B. Bisceglia	Date: 04/21/03	
Page 2 of 2	Proprietary and confidential: The information contained in this specification is the sole property of S.R. Smith LLC. Any reproduction in part or whole without the written consent of S.R. Smith LLC is prohibited.		



Product Specifications - Drawing

30" Deluxe Starting Platform

A	B	C
0.0	30.00	19.75
0.5	29.50	19.25
1.0	29.00	18.75
1.5	28.50	18.25
2.0	28.00	17.75
2.5	27.50	17.25
3.0	27.00	16.75
3.5	26.50	16.25
4.0	26.00	15.75
4.5	25.50	15.25
5.0	25.00	14.75
5.5	24.50	14.25
6.0	24.00	13.75
6.5	23.50	13.25
7.0	23.00	12.75
7.5	22.50	12.25
8.0	22.00	11.75
8.5	21.50	11.25
9.0	21.00	10.75
9.5	20.50	10.25
10.0	20.00	9.75
10.5	19.50	9.25
11.0	19.00	8.75
11.5	18.50	8.25
12.0	18.00	7.75

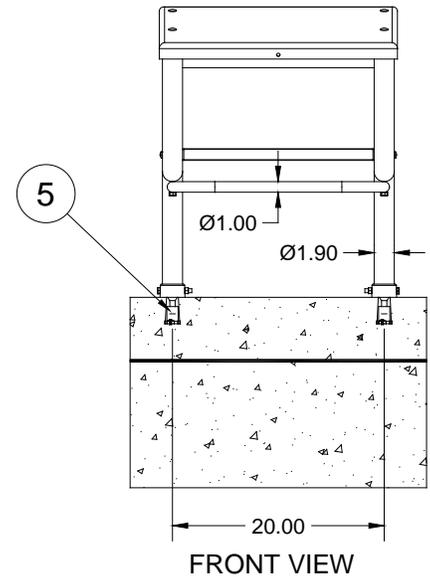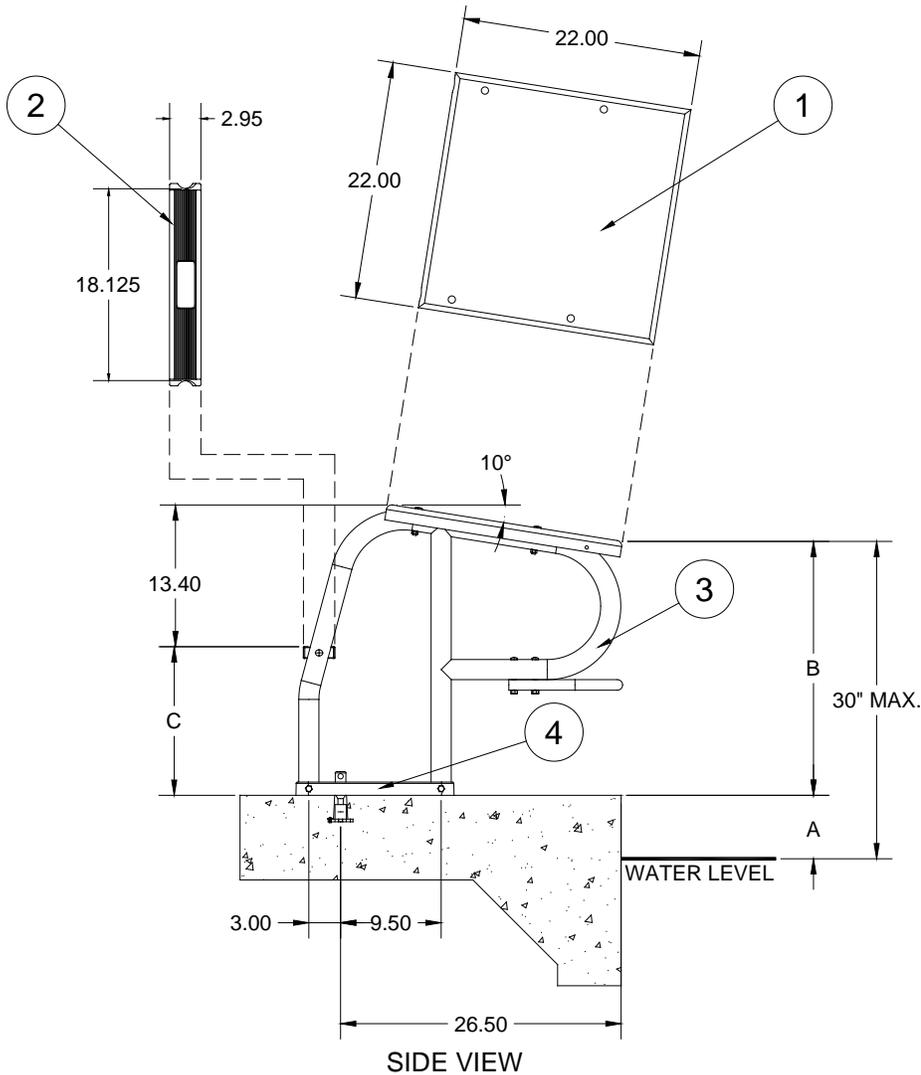

Specification Number:	SRS-303	
Product Description:	30" Deluxe Starting Platform	
S.R. Smith Part Number:	A41796-1	Scale: NTS
Revision:	B	Date: 08/08/13
Written By:	T. Weil	Date: 04/21/03
Approved By:	B. Bisceglia	Date: 04/21/03
Page 1 of 2	Proprietary and confidential: The information contained in this specification is the sole property of S.R. Smith LLC. Any reproduction in part or whole without the written consent of S.R. Smith LLC is prohibited.	

S.R. Smith, LLC
 P.O. Box 400, 1017 SW Berg Parkway
 Canby, Oregon 97013
 Tel: (800) 824-4387 (503) 266-2231
 Fax: (503) 266-4334
www.srsmith.com