



**PROFESSIONAL  
OUTDOOR LIGHTING**

Type:

Model:

Project:

## SPECIFICATION SHEET

### MODEL 2106 Landscape Series • Brass & Copper • Up & Accent Lights

#### FIXTURE SPECIFICATIONS:

**HOUSING/SHROUD:**

Heavy-gauge, extruded, solid brass housing fitted to a precision CNC-machined, solid brass base. A solid brass lens-retaining flange and high temperature, clear silicone seal – provides a superior weather-tight seal.

**FINISH:**

Olde Brass.

**SOCKET/LAMP HOLDER:**

Top grade ceramic socket with nickel contacts, stainless steel springs, and Teflon-jacketed wire leads.

**LENS:**

Clear, tempered, shock and heat-resistant, soda-lime glass lens. Optical effect lenses are available; see accessories column on fixture ordering information chart.

**LAMP TYPE:**

MR-16 LED Lamp Only - 36° Flood, 4.5W is standard.

**Optics:**

Available in 15° Narrow Spot, 25° Spot, 36° Flood, or 60° Wide Flood distributions.

**MOUNTING:**

Injection-molded composite adjustable knuckle with 1/2" NPS thread. Fixture may be mounted into threaded hubs in junction boxes, ground stakes (GR), tree mount boxes (TR), or mounting canopies (WR).

**FASTENERS:**


All fasteners are stainless steel.

**WIRING:**

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

All Vista luminaires are **MADE IN U.S.A.**

#### DIMENSIONS:

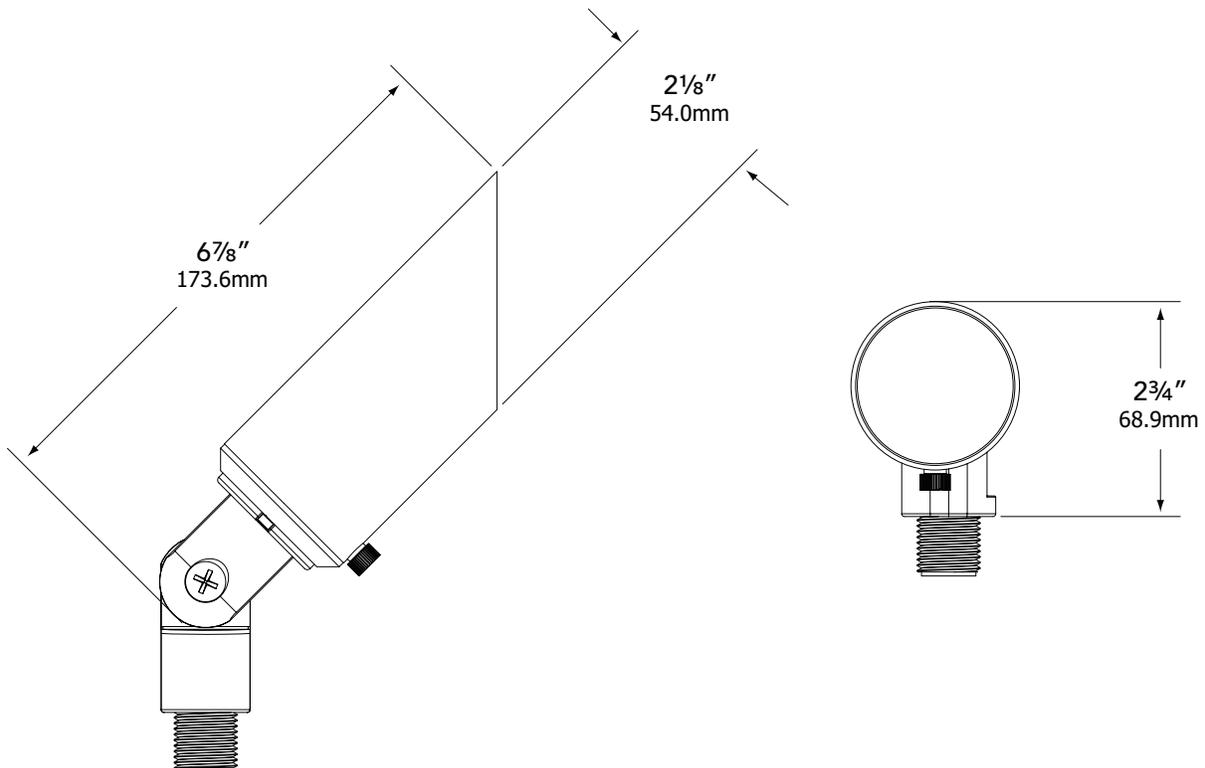

*Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.*



## SPECIFICATION SHEET

### MODEL 2106 Landscape Series • Brass & Copper • Up & Accent Lights

#### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

**EXAMPLE: GR-2106-BSO-4.5-W-25-SL**

MOUNTING	MODEL	FINISH	WATTAGE	COLOR TEMP	DISTRIBUTION	ACCESSORIES
GR- ABS ground stake WR- Wall-mount canopy TR- Tree-mount junction box	2106	BSO - Olde Brass	4.5 5.5	W - Warm	15 - 15° Narrow Spot 25 - 25° Spot 36 - 36° Flood 60 - 60° Wide Flood	FR - Frosted Lens BL - Flat Cool Blue Lens SL - Flat Spread Lens DBL - Flat Dark Blue Lens GL - Flat Dark Green Lens RL - Flat Red Lens YL - Flat Amber Lens HL - Honeycomb Louver

Fixtures shipped with standard lamp, unless otherwise specified.  
Fixtures shipped with specified mounting hardware.