



PROFESSIONAL
OUTDOOR LIGHTING

Type:

Model:

Project:

SPECIFICATION SHEET

MODEL 4243-LED Landscape Series • Step & Brick Lights

FIXTURE SPECIFICATIONS:

HOUSING:

Die-cast, copper-free, aluminum housing.

FINISH:

Polyester powder-coated finish available in Black, Architectural Brick, Architectural Bronze, Light Bronze, Dark Bronze, Granite, Terracotta, Rust, Hunter Green, Weathered Bronze, Weathered Iron, White, Verde, Pewter, and Mocha.

LENS:

Frosted, tempered, shock & heat-resistant soda-lime glass lens.

LAMP TYPE:

High Output LED with Vista exclusive smart-driver, powered to operate for 50,000 hours.

ELECTRICAL:

Input voltage range 6 - 15V AC or 12V DC, regulated to achieve uniform illumination throughout the cable run of fixtures. Integral surge & reverse polarity protection.

MOUNTING:

Surface mounting plate included, no recessed box required.

FASTENERS:


All fasteners are stainless steel.

WIRING:

Provided with a 3' pigtail of 18-2 SPT1 UV resistant cable & underground connectors for a secure connection to the supply cable.

All Vista luminaires are **MADE IN THE U.S.A.**

DIMENSIONS:

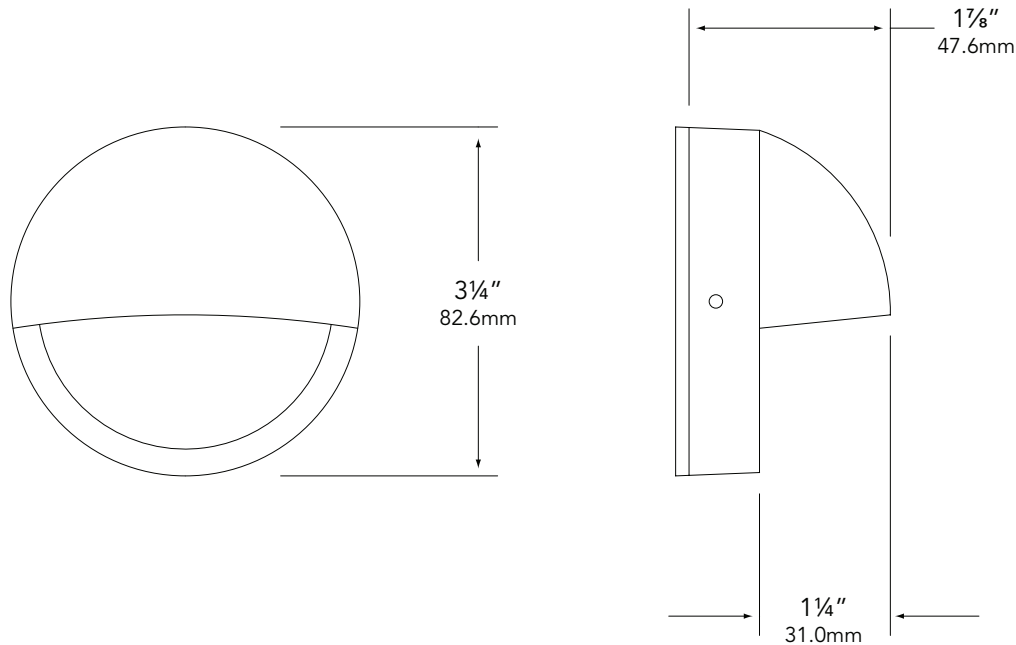

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



PROFESSIONAL
OUTDOOR LIGHTING

SPECIFICATION SHEET

MODEL 4243-LED Landscape Series • Step & Brick Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: SL-4243-B-W-LB2ND

| MOUNTING | MODEL | FINISH | COLOR TEMPERATURE | LAMP |
|----------------|-------|---|-------------------------------------|---|
| SL- Step light | 4243 | B - Black BR - Architectural Brick Z - Architectural Bronze LZ - Light Bronze DZ - Dark Bronze GT - Granite TC - Terracotta R - Rust HG - Hunter Green WB - Weathered Bronze WI - Weathered Iron W - White G - Verde P - Pewter M - Mocha | W - Warm N - Neutral C - Cool | LB2ND - 2.5 watt LB5ND - 5 watt LED - Group B Emitter Qty - 1 Temperature - Warm (W), Neutral (N), Cool (C) Operating voltage range - 6 to 15V. (Please see lamp order code column on lamp guide, Vista product catalog.) |

Fixtures shipped with standard lamp, unless otherwise specified.

Fixtures shipped with specified mounting hardware.

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.